

COLORTON

SERIES

— FULL POLISH FINISH —




Sonata[®]

VITRIFIED TILES



600x1200mm


POLISHED GLAZED VITRIFIED TILES

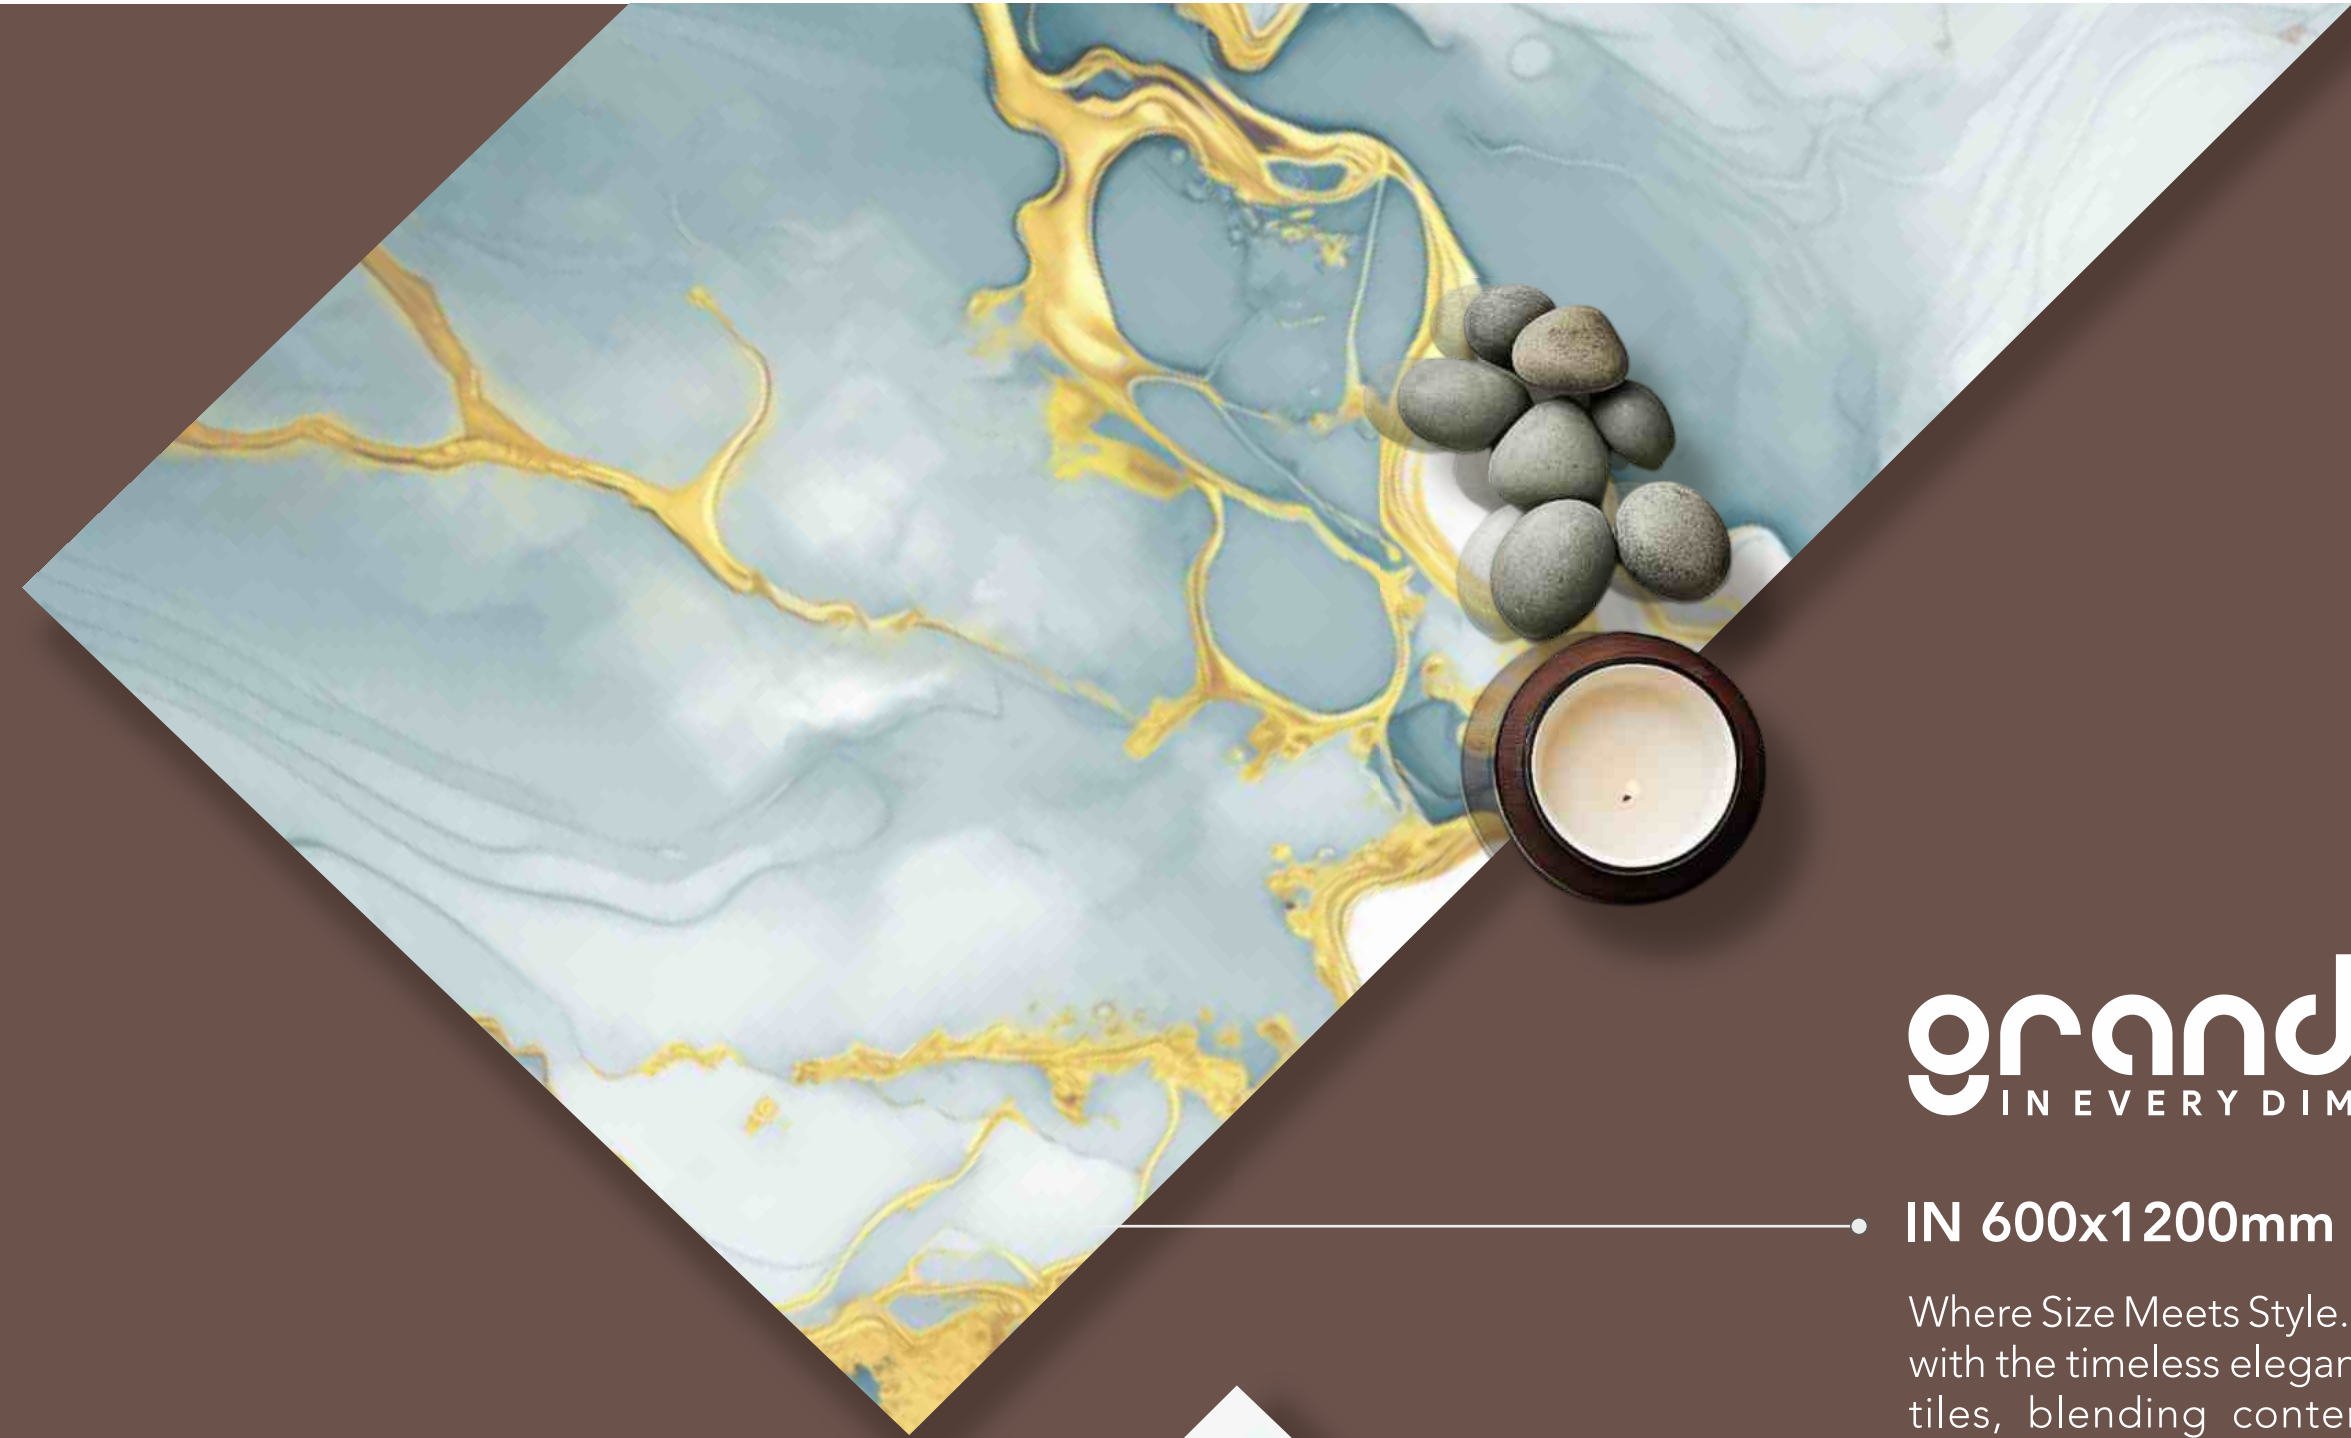

grandeur
IN EVERY DIMENSION

• **IN 600x1200mm**

Where Size Meets Style. Elevate your spaces with the timeless elegance of our 600x1200mm tiles, blending contemporary design with vibrant color palettes for a truly stunning aesthetic.

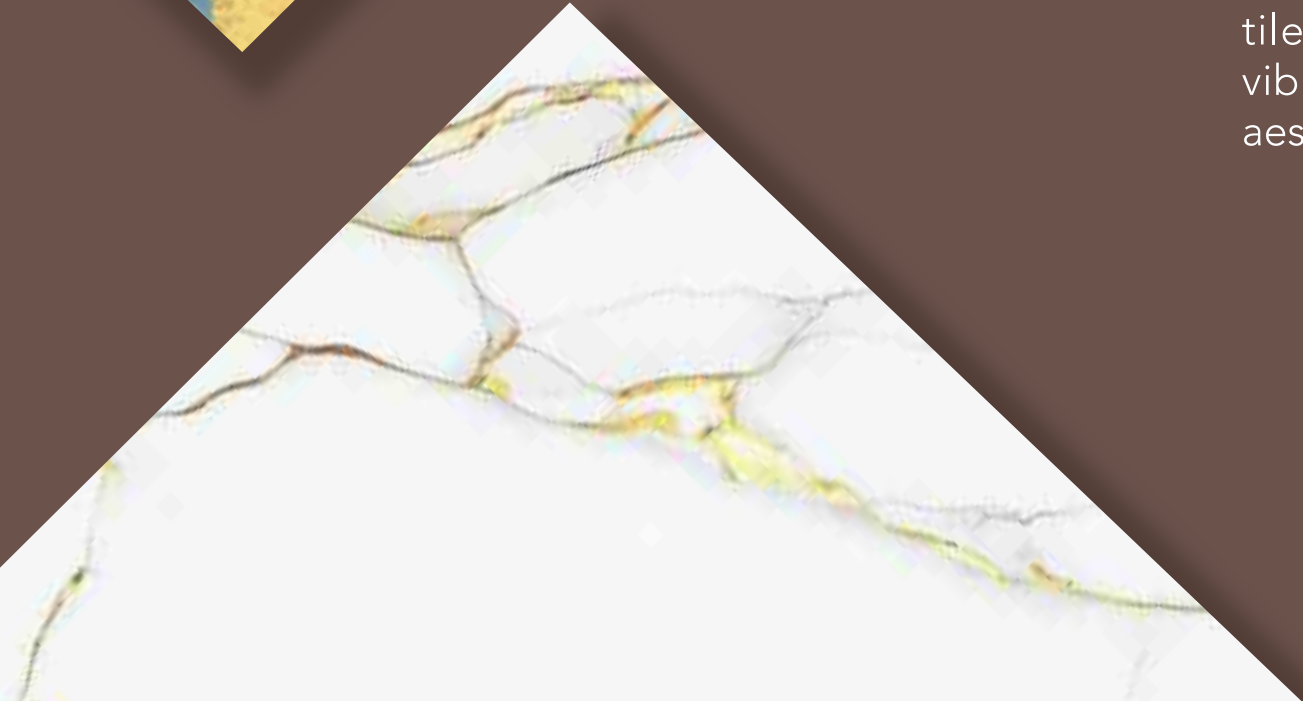

600X
1200MM

FEATURE & APPLICATION



FEATURE

 Long Lasting	 Easy to Clean	 Impact Resistance	 Easy Installation
 Hygienic Surface	 Fire Resistance	 Chemical Resistance	 Thermal Shock Resistance
 Frost Resistance	 Low Water Absorption	 Dimensional Stability	




APPLICATION

 Residential	 Corporate Building	 Hotels, Cafes & Restaurants	 Industrial
 Hospitals	 Airports	 Schools & Colleges	 Spas & Wellness Centers
 Gymnasium	 Halls & Corridors	 Supermarkets & Malls	 Religious Places

INDEX

ELEGANCE IN EVERY DETAIL

Discover the timeless beauty of the Colorton Series. Designed to mimic the luxurious charm of nature, these 600x1200mm tiles blend sophistication with durability. Perfect for modern interiors, they bring a refined touch to any space.

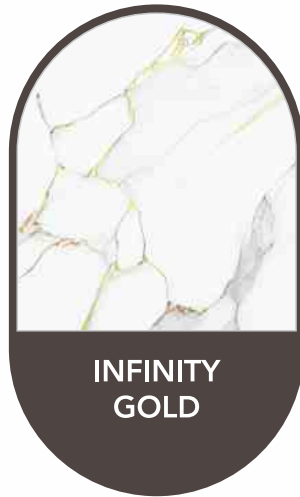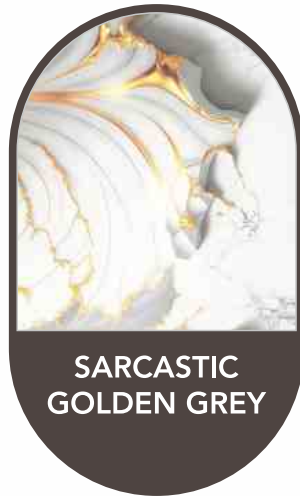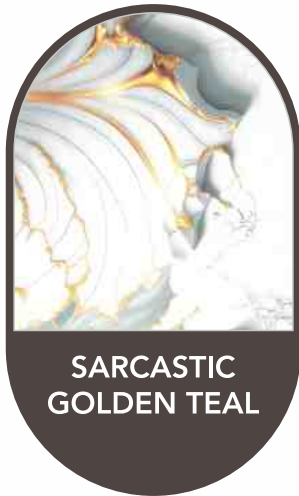

600x1200mm
POLISHED GLAZED VITRIFIED TILES

COLORTON

Introducing our stunning new collection of 600x1200mm tiles, designed to elevate interior spaces to new heights of sophistication and style. Crafted with meticulous attention to detail, these tiles offer a seamless blend of form and function, making them perfect for a wide range of interior applications.

SERIES

ORIAN AQUA



RANDOM 3



MILANO ROSE





RANDOM 3



Size:
600x1200mm

Finish:
FULL POLISH

SARCASTIC GOLDEN TEAL

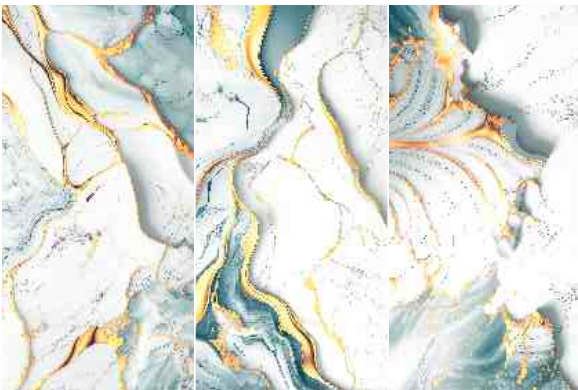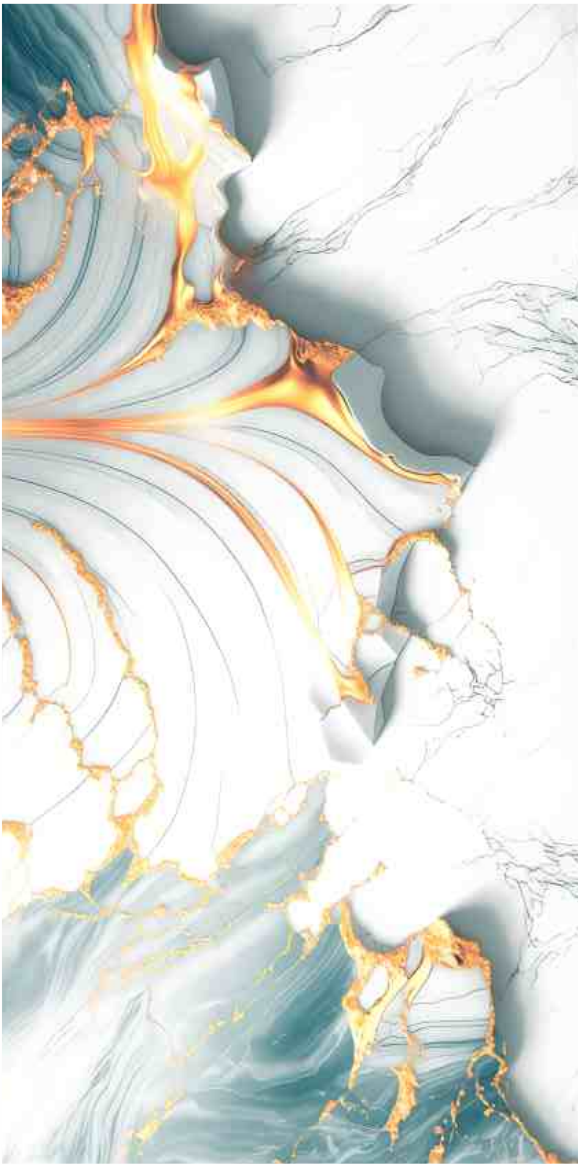

RANDOM 3



SARCASTIC GOLDEN PINK



RANDOM 3



Size:
600x1200mm

Finish:
FULL POLISH

SARCASTIC GOLDEN GREY



RANDOM 3

COLORTON SERIES

Size: 600x1200mm | Finish: FULL POLISH



KERAMOS TEAL



RANDOM 5

KERAMOS PINK



RANDOM 5



Size:
600x1200mm

Finish:
FULL POLISH

KERAMOS GOLD





RANDOM 5



Size:
600x1200mm

Finish:
FULL POLISH

MYSTERIOUS AQUA GOLD

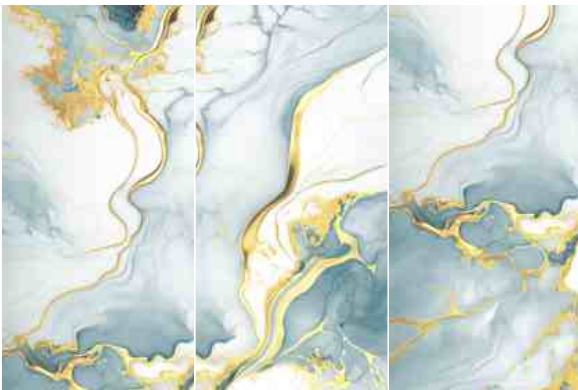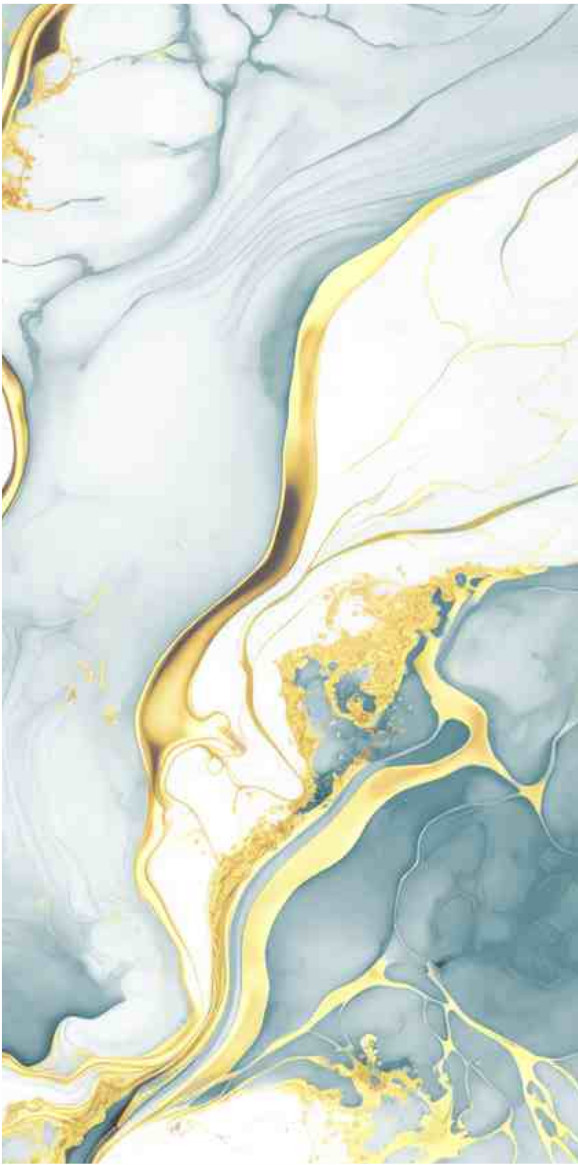

RANDOM 3



Size:
600x1200mm

Finish:
FULL POLISH

MARSELLA TEAL



RANDOM 3



Size:
600x1200mm

Finish:
FULL POLISH

MARSELLA GREEN




RANDOM 3



Size:
600x1200mm

Finish:
FULL POLISH

ISABELLA PINK

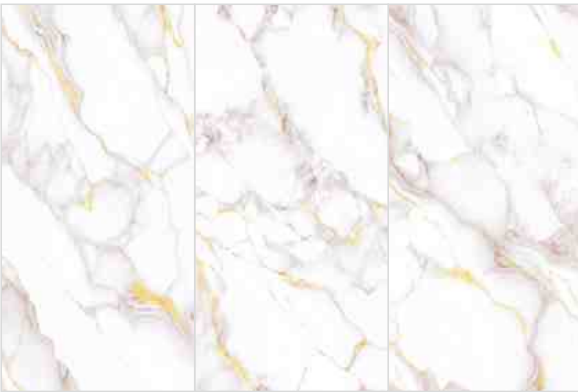


RANDOM 3



Size:
600x1200mm

Finish:
FULL POLISH

MERLIN AQUA

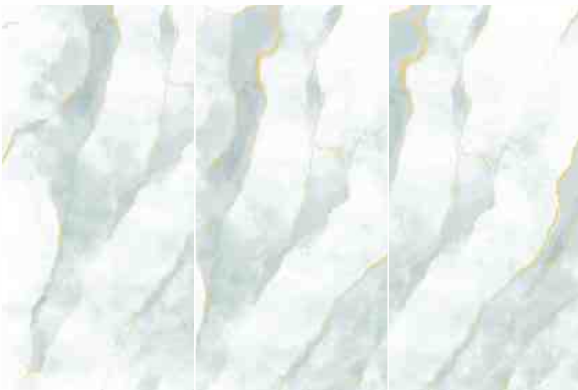

RANDOM 3

COLORTON SERIES



Size:
600x1200mm

Finish:
FULL POLISH



GRIZLY MINT




RANDOM 3





MELBOURNE WHITE

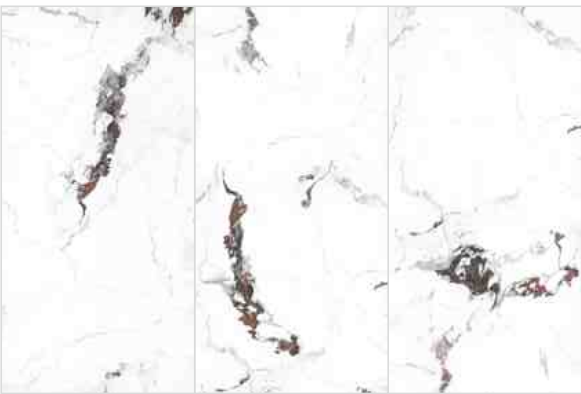

RANDOM 3



ASPIRE WHITE



RANDOM 3



Size:
600x1200mm

Finish:
FULL POLISH

INFINITY GOLD



RANDOM 3


VARIATION GUID




DESIGN, PATTERN & SHADE VARIATION GUIDE

Current development efforts have made Ceramic tiles to resemble and look authentically identical to natural materials (Stone, Wood, Fabric), and it has become increasingly difficult in many cases, to distinguish between the tow.


Recognizing this situation, it is necessary to be informed on the grade of Design & Pattern variation that is expected form these products. as a general reference the Design & Pattern guide below classifies a scale of ranges according to the degree of the variation.




V1 Uniform Appearance



V2 Slight Variation



V3 Moderate Variation



V4 Substantial Variation

THE CLASSIFICATION IS AS FOLLOW:

V1 Minimal Variation **V2** Slight Variation **V3** Random Variation **V4** Substantial Variation

HIGH DEFINITION IMAGE

While Laying the tiles please follow the arrow Mark on the back of the tiles For removing the wax from the surface of the tiles please use the soft cotton cloth for rubbing white any boric/talc powder

TEN COMMANDMENTS FOR LAYING TILES

1. Surface should be cleaned properly before installation.
2. Tiles should be segregated according to batch no. & manufacturing date
3. Dry fixing : lay the tiles in the desired patterns, shades and signs etc. before final laying.
4. Fixing by good quality tile-adhesive or with 1:4 cement & sand mortar.
5. Use of 2 to 5 mm SPACERS is recommended.
6. Do not use an iron hammer or some heavy material to press the tiles.
7. After 48 hours for bed curing, fill the joints with desired grouts.
8. Clean tiles with detergent powder or soap.
9. Cover the surface with plastic sheet / POP until it becomes ready for use.

TECHNICAL SPECIFICATION



TECHNICAL SPECIFICATION OF GVT

SIZE	Pcs. / Box	Coverage Area / Box
600x1200mm	2 Pcs	1.44 sq. mtr.

CHARACTERISTIC	International Standards Group B1a- ISO 13006 Annx. G.	SONATA MEAN VALUE	TEST METHOD
Deviation In Length	± 0.60%	± 0.10%	ISO-10545-2
Deviation In Thickness	± 5.00%	± 4.00%	ISO-10545-2
Straightness Of Sides	± 0.50%	± 0.10%	ISO-10545-2
Rectangularity	± 0.60%	± 0.10%	ISO-10545-2
Surface Flatness	± 0.50%	± 0.15%	ISO-10545-2
Surface Quality (%)	Min. 6	Min. 6	ISO-10545-2
Scratch Hardness of Surface (Moh's scale)	A minimum of 95% of the tiles shall be free from visible defects	A minimum of 95% of the tiles shall be free from visible defects	ISO-10545-2
Modulus of Rupture	> 35N/mm3	> 38N/mm2	ISO-10545-4
Breaking Strength	> 1300 N	> 1500 N	ISO-10545-4
Water Absorption	< 0.50%	< 0.08%	ISO-10545-3
Stain Resistance	Stain Resistant	Stain Resistant	ISO-10545-14
Chemical Resistance	No Damage	No Damage	ISO-10545-13
Thermal Expansion	< 9 x 10-6	< 7 x 10-6	ISO-10545-8
Moisture Expansion	Nil	Nil	ISO-10545-10
Thermal Shock Resistance	No Damage	No Damage	ISO-10545-9
Resistance to Surface Abrasion	Manu. to State Abrasion Class	PEI class 3-5	ISO-10545-7
Bulk Density	> 2.00	> 2.20	ISO-10545-3

Note: Colour Shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However, the company reserve the right to change the specifications without prior notice. Sometime variations in shade or size being inherent to ceramic industry may occur. Before fixing, we advise you to follow the fixing instructions on the cartons of the tiles as no responsibility can be accepted by the company once the tiles have been fixed.



SONATA CERAMICA PVT. LTD.

Near Sabar Dairy, Talod Road, At. & Po.: Gadhoda,
Ta. Himmatnagar - 383 001.(S.K.), Gujarat. India

Mob.: +91 98240 24333.

☎ .: +91 90330 24333

E-mail: info@sonatatile.com



visit us at:

www.sonatatile.com



www.ideationdesign.in