

# Rocker

SERIES

— CARVING EFFECT —



The Mark Of Assurance



**600x600mm**  
GLAZED VITRIFIED TILES

600X  
600MM

GLAZED VITRIFIED TILES

## Versatile Elegance

Elevate your space with the timeless charm and practicality of our 600x600 tiles, and experience the versatile elegance they bring to any setting



FEATURE & APPLICATION



DESIGN YOUR LUXURY  
INTERIORS WITH A  
TIMELESS CHARM

FEATURE

|                  |                      |                       |                          |
|------------------|----------------------|-----------------------|--------------------------|
|                  |                      |                       |                          |
| Long Lasting     | Easy to Clean        | Impact Resistance     | Easy Installation        |
|                  |                      |                       |                          |
| Hygienic Surface | Fire Resistance      | Chemical Resistance   | Thermal Shock Resistance |
|                  |                      |                       |                          |
| Frost Resistance | Low Water Absorption | Dimensional Stability |                          |

APPLICATION


|             |                    |                             |                         |
|-------------|--------------------|-----------------------------|-------------------------|
|             |                    |                             |                         |
| Residential | Corporate Building | Hotels, Cafes & Restaurants | Industrial              |
|             |                    |                             |                         |
| Hospitals   | Airports           | Schools & Colleges          | Spas & Wellness Centers |
|             |                    |                             |                         |
| Gymnasium   | Halls & Corridors  | Supermarkets & Malls        | Religious Places        |

# INDEX

## ELEGANCE IN EVERY DETAIL

Discover the timeless beauty of the Rocker Series. Designed to mimic the luxurious charm of natural stone, these 600x600mm tiles blend sophistication with durability. Perfect for modern interiors, they bring a refined touch to any space.





**600x600mm**

GLAZED VITRIFIED TILES

# ROCKER

SERIES

Elevate your interiors with the timeless allure of our Rocker Series. Each tile shimmers with clarity and precision, transforming spaces into statements of pure sophistication and refined luxury.

# ROCKER SERIES



Size:  
600x600mm

Finish:  
CARVING EFFECT



ANTONIO PEARL



RANDOM 3

# ROCKER SERIES



Size:  
600x600mm

Finish:  
CARVING EFFECT



BRAVIA PEARL



RANDOM 3

# ROCKER SERIES




Size:  
600x600mm

Finish:  
CARVING EFFECT



BRAVIA GRIS

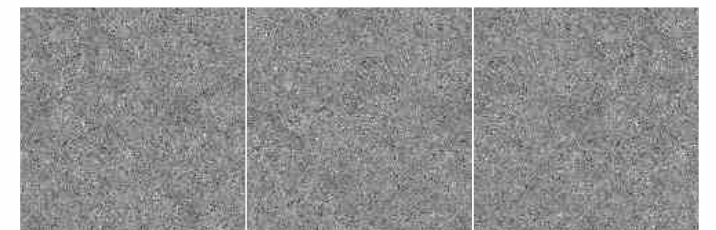

RANDOM 3

# ROCKER SERIES



Size:  
600x600mm

Finish:  
CARVING EFFECT



FLORENCIEA BROWN



RANDOM 3

# ROCKER SERIES



Size:  
600x600mm

Finish:  
CARVING EFFECT



GLAMA BIANCO



RANDOM 3

# ROCKER SERIES




Size:  
600x600mm

Finish:  
CARVING EFFECT



BERLIN SILVER

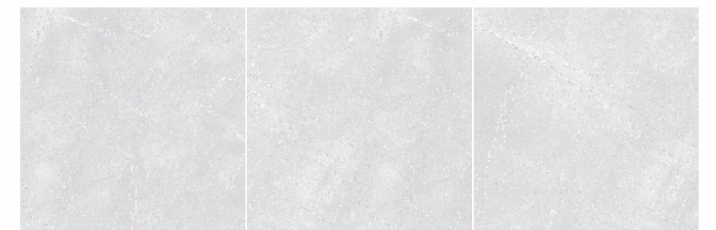

RANDOM 3

# ROCKER SERIES



Size:  
600x600mm

Finish:  
MATT FINISH



BERLIN SMOKE



RANDOM 3

# ROCKER SERIES



Size:  
600x600mm

Finish:  
CARVING EFFECT



CORNOS GREY



RANDOM 3

# ROCKER SERIES



Size:  
600x600mm

Finish:  
CARVING EFFECT



CORNOS GRIS



RANDOM 3

# ROCKER SERIES



Size:  
600x600mm

Finish:  
CARVING EFFECT



STATURIO MULTI



RANDOM 3

# ROCKER SERIES




Size:  
600x600mm

Finish:  
CARVING EFFECT




DENISH WHITE

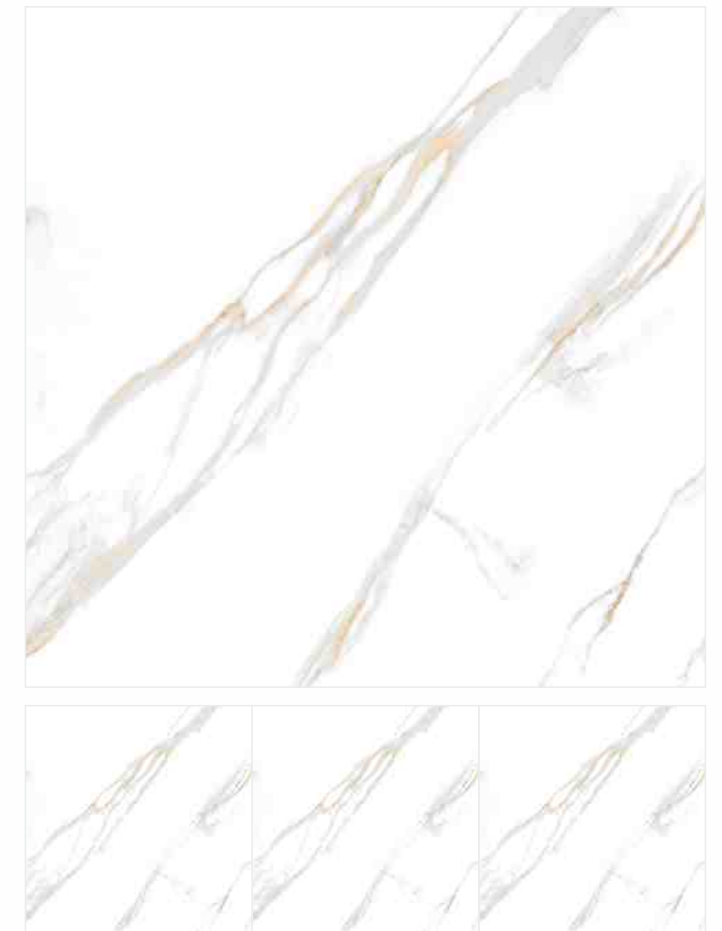


## DESIGN, PATTERN & SHADE VARIATION GUIDE

Current development efforts have made Ceramic tiles to resemble and look authentically identical to natural materials (Stone, Wood, Fabric), and it has become increasingly difficult in many cases, to distinguish between the tow.


Recognizing this situation, it is necessary to be informed on the grade of Design & Pattern variation that is expected form these products. as a general reference the Design & Pattern guide below classifies a scale of ranges according to the degree of the variation.




V1 Uniform Appearance



V2 Slight Variation



V3 Moderate Variation



V4 Substantial Variation

## THE CLASSIFICATION IS AS FOLLOW:

**V1** Minimal Variation    **V2** Slight Variation    **V3** Random Variation    **V4** Substantial Variation

## HIGH DEFINITION IMAGE

While Laying the tiles please follow the arrow Mark on the back of the tiles For removing the wax from the surface of the tiles please use the soft cotton cloth for rubbing white any boric/talc powder

## TEN COMMANDMENTS FOR LAYING TILES

1. Surface should be cleaned properly before installation.
2. Tiles should be segregated according to batch no. & manufacturing date
3. Dry fixing : lay the tiles in the desired patterns, shades and signs etc. before final laying.
4. Fixing by good quality tile-adhesive or with 1:4 cement & sand mortar.
5. Use of 2 to 5 mm SPACERS is recommended.
6. Do not use an iron hammer or some heavy material to press the tiles.
7. After 48 hours for bed curing, fill the joints with desired grouts.
8. Clean tiles with detergent powder or soap.
9. Cover the surface with plastic sheet / POP until it becomes ready for use.

# TECHNICAL SPECIFICATION



## TECHNICAL SPECIFICATION OF GVT

| SIZE      | Pcs. / Box | Coverage Area / Box |
|-----------|------------|---------------------|
| 600x600mm | 4 Pcs      | 1.44 sq. mtr.       |

| CHARACTERISTIC                               | International Standards<br>Group B1a-<br>ISO 13006 Annx. G.            | SONATA<br>MEAN VALUE                                                   | TEST METHOD  |
|----------------------------------------------|------------------------------------------------------------------------|------------------------------------------------------------------------|--------------|
| Deviation In Length                          | ± 0.60%                                                                | ± 0.10%                                                                | ISO-10545-2  |
| Deviation In Thickness                       | ± 5.00%                                                                | ± 4.00%                                                                | ISO-10545-2  |
| Straightness Of Sides                        | ± 0.50%                                                                | ± 0.10%                                                                | ISO-10545-2  |
| Rectangularity                               | ± 0.60%                                                                | ± 0.10%                                                                | ISO-10545-2  |
| Surface Flatness                             | ± 0.50%                                                                | ± 0.15%                                                                | ISO-10545-2  |
| Surface Quality (%)                          | Min. 6                                                                 | Min. 6                                                                 | ISO-10545-2  |
| Scratch Hardness of Surface<br>(Moh's scale) | A minimum of 95%<br>of the tiles shall be<br>free from visible defects | A minimum of 95%<br>of the tiles shall be<br>free from visible defects | ISO-10545-2  |
| Modulus of Rupture                           | > 35N/mm3                                                              | > 38N/mm2                                                              | ISO-10545-4  |
| Breaking Strength                            | > 1300 N                                                               | > 1500 N                                                               | ISO-10545-4  |
| Water Absorption                             | < 0.50%                                                                | < 0.50%                                                                | ISO-10545-3  |
| Stain Resistance                             | Stain Resistant                                                        | Stain Resistant                                                        | ISO-10545-14 |
| Chemical Resistance                          | No Damage                                                              | No Damage                                                              | ISO-10545-13 |
| Thermal Expansion                            | < 9 x 10-6                                                             | < 7 x 10-6                                                             | ISO-10545-8  |
| Moisture Expansion                           | Nil                                                                    | Nil                                                                    | ISO-10545-10 |
| Thermal Shock Resistance                     | No Damage                                                              | No Damage                                                              | ISO-10545-9  |
| Resistance to Surface Abrasion               | Manu. to State<br>Abrasion Class                                       | PEI class 3-5                                                          | ISO-10545-7  |
| Bulk Density                                 | > 2.00                                                                 | > 2.20                                                                 | ISO-10545-3  |

Note: Colour Shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However, the company reserve the right to change the specifications without prior notice. Sometime variations in shade or size being inherent to ceramic industry may occur. Before fixing, we advise you to follow the fixing instructions on the cartons of the tiles as no responsibility can be accepted by the company once the tiles have been fixed.



**SONATA CERAMICA PVT. LTD.**

Near Sabar Dairy, Talod Road, At. & Po.: Gadhoda,  
Ta. Himmatnagar - 383 001.(S.K.), Gujarat. India

Mob.: +91 98240 24333.

☎ .: +91 90330 24333

**E-mail: [info@sonatatile.com](mailto:info@sonatatile.com)**



visit us at:

**[www.sonatatile.com](http://www.sonatatile.com)**



GET IT ON  
Google Play



[www.ideationdesign.in](http://www.ideationdesign.in)