


SUPER HIGH GLOSS SERIES




600x1200mm
POLISHED GLAZED VITRIFIED TILES

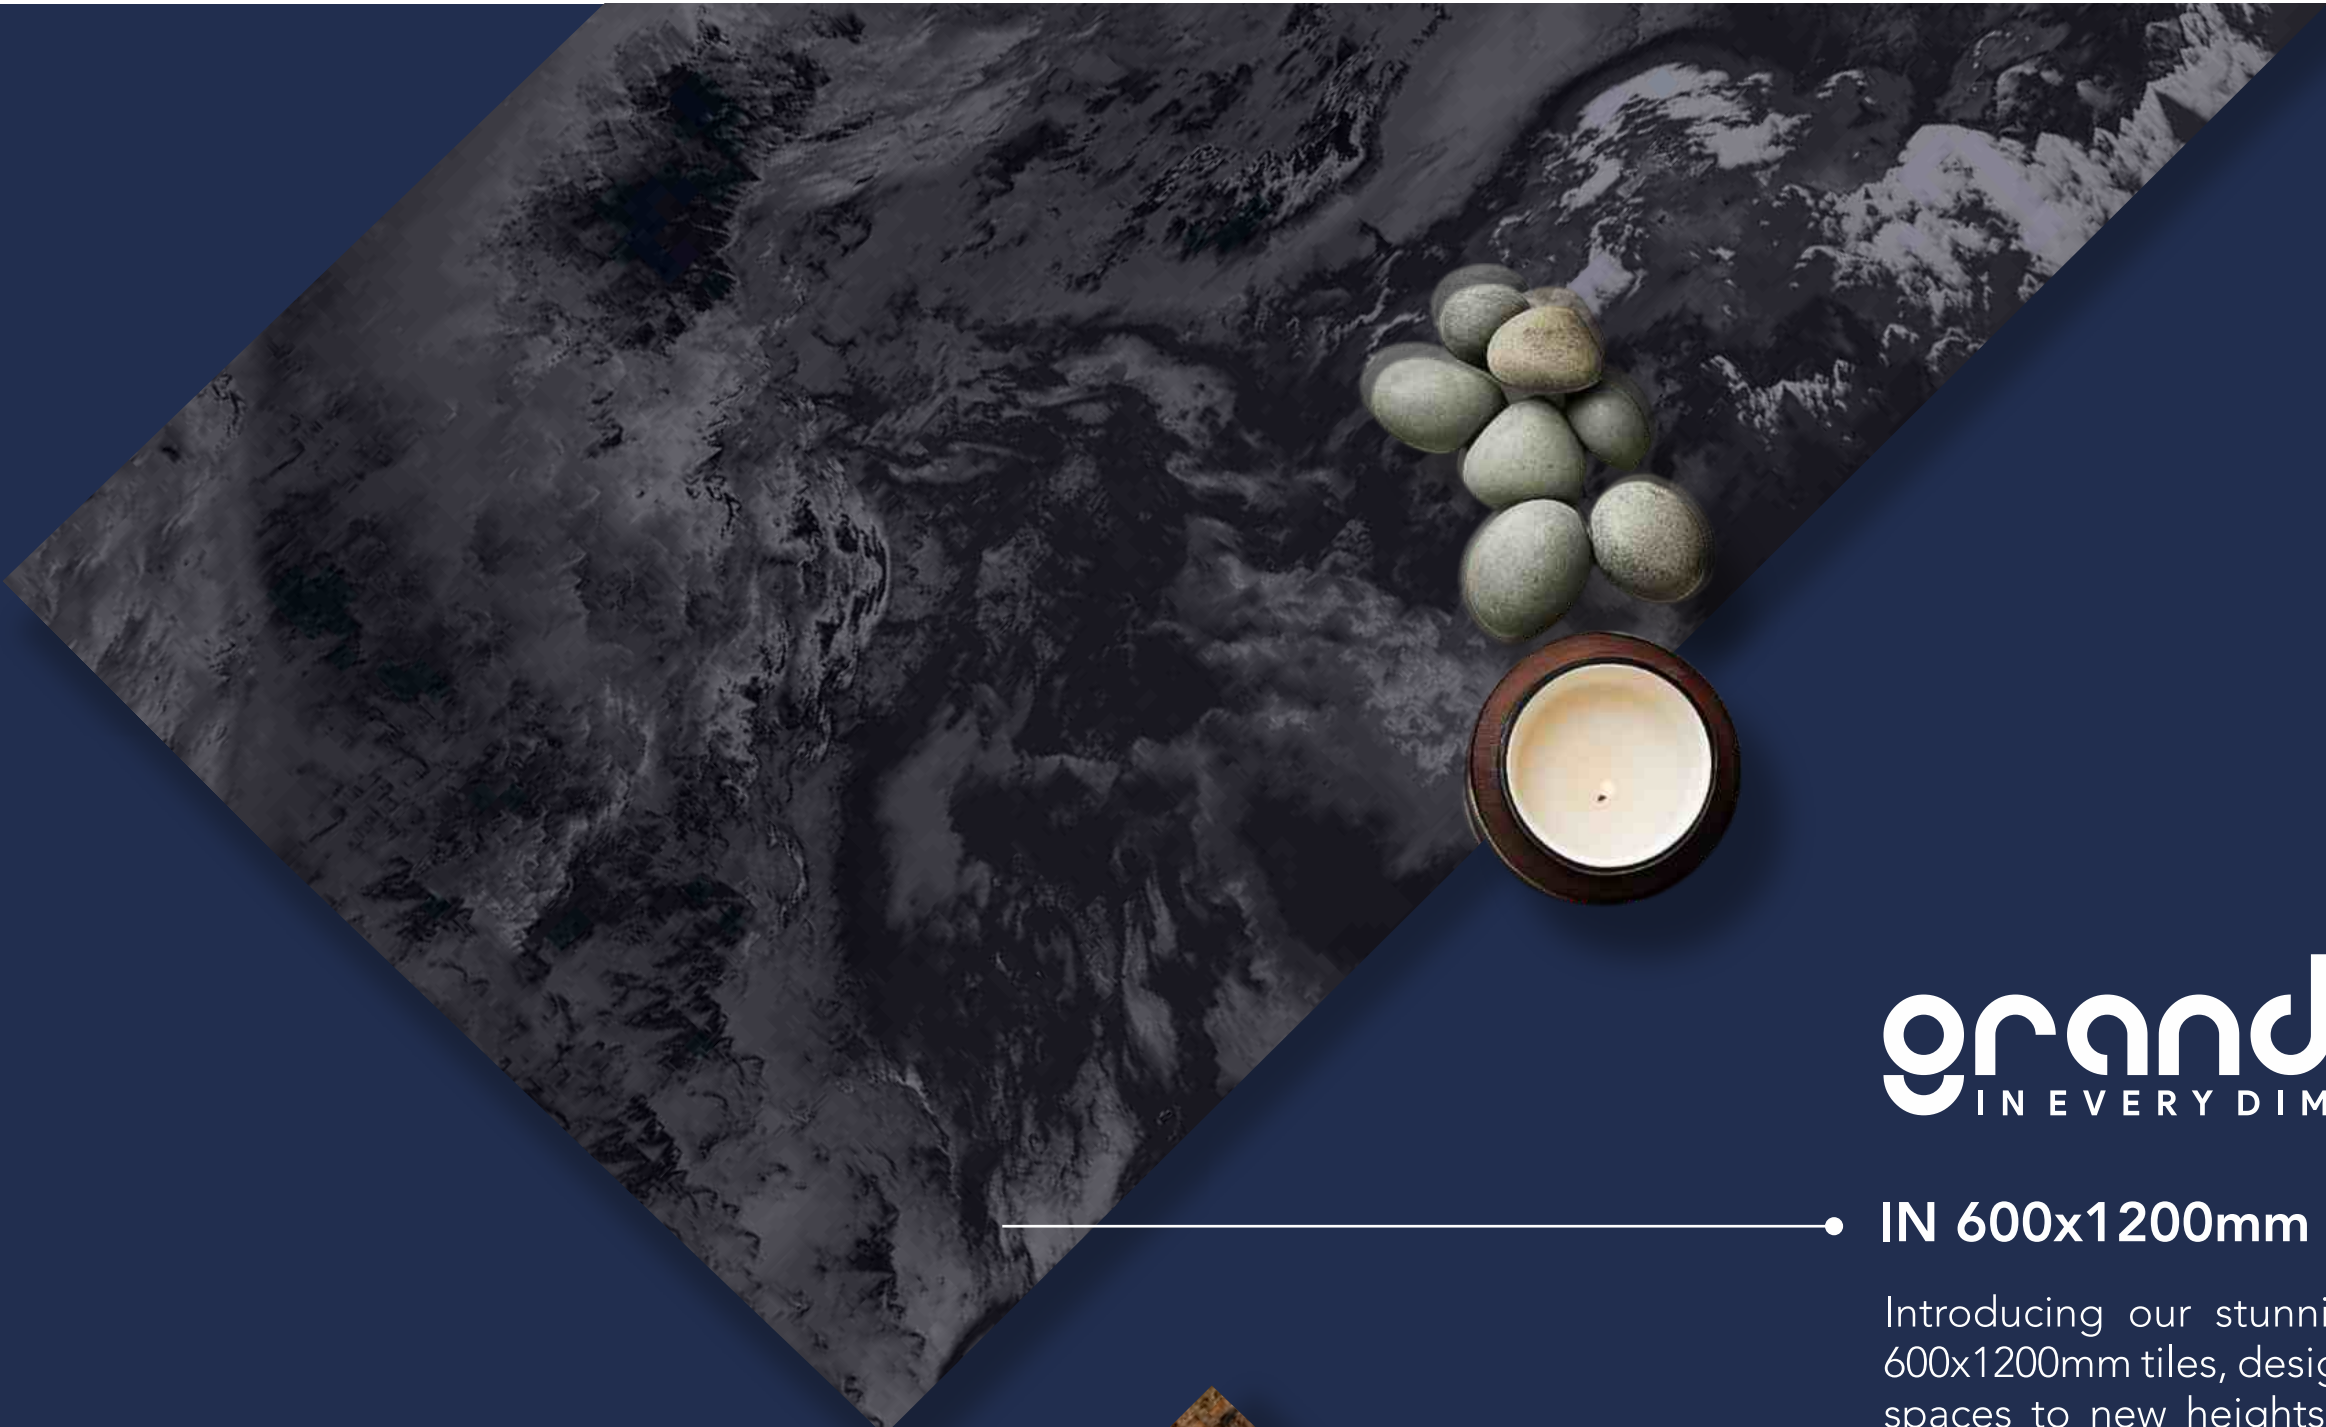

grandeur
IN EVERY DIMENSION

• **IN 600x1200mm**

Introducing our stunning new collection of 600x1200mm tiles, designed to elevate interior spaces to new heights of sophistication and style. Crafted with meticulous attention to detail, these tiles offer a seamless blend of form and function, making them perfect for a wide range of interior applications.

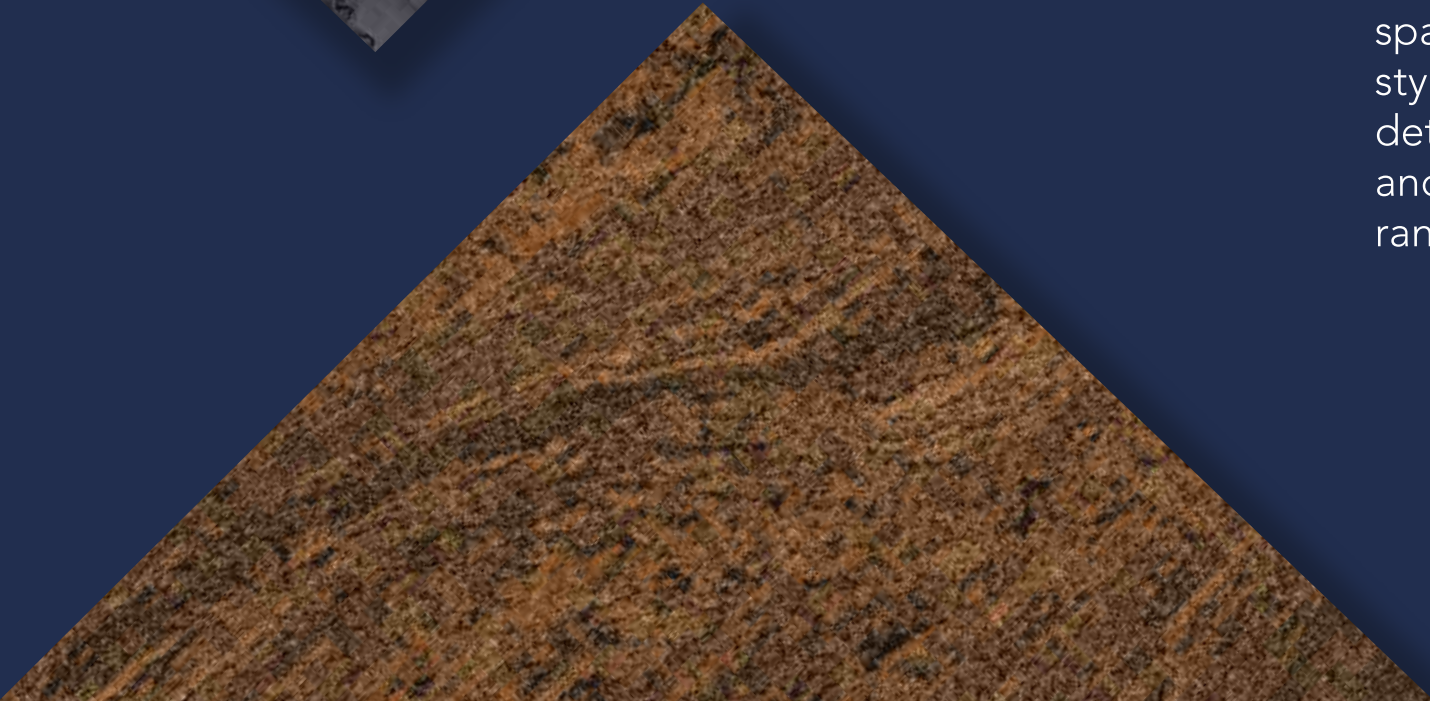

600X
1200MM

FEATURE & APPLICATION



FEATURE

Long Lasting	Easy to Clean	Impact Resistance	Easy Installation
Hygienic Surface	Fire Resistance	Chemical Resistance	Thermal Shock Resistance
Frost Resistance	Low Water Absorption	Dimensional Stability	

APPLICATION

Residential	Corporate Building	Hotels, Cafes & Restaurants	Industrial
Hospitals	Airports	Schools & Colleges	Spas & Wellness Centers
Gymnasium	Halls & Corridors	Supermarkets & Malls	Religious Places

INDEX

ELEGANCE IN EVERY DETAIL

Discover the timeless beauty of the Opulent Series. Designed to mimic the luxurious charm of nature, these 600x1200mm tiles blend sophistication with durability. Perfect for modern interiors, they bring a refined touch to any space.




BRILLIANT
WHITE




MEGAN
STATURIO



NOBLE
WHITE

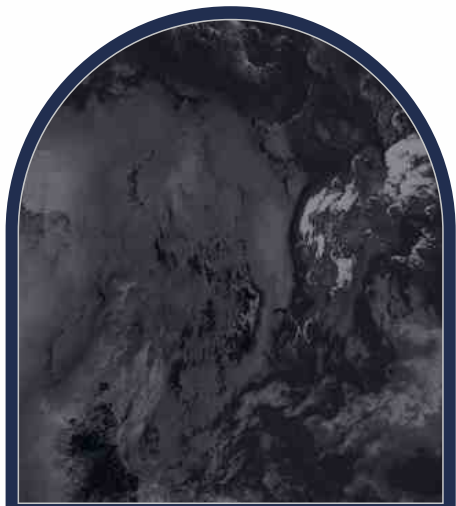

SPECIO
STATURIO

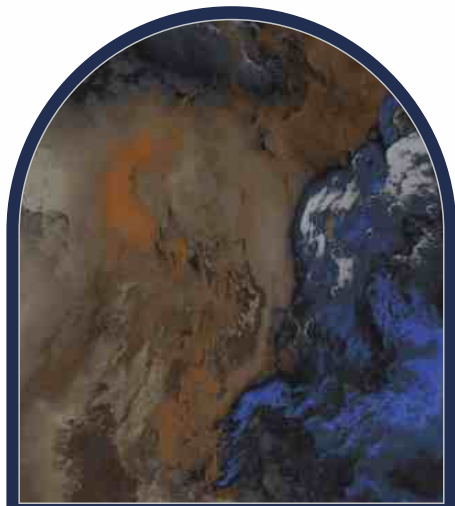


SUPERB
STATURIO

600x1200mm
POLISHED GLAZED VITRIFIED TILES

SUPER HIGH GLOSS SERIES

Experience the beauty of refined textures with our Super High Gloss Collection. Crafted to enhance depth and sophistication, these tiles introduce a sleek, modern elegance to any space.

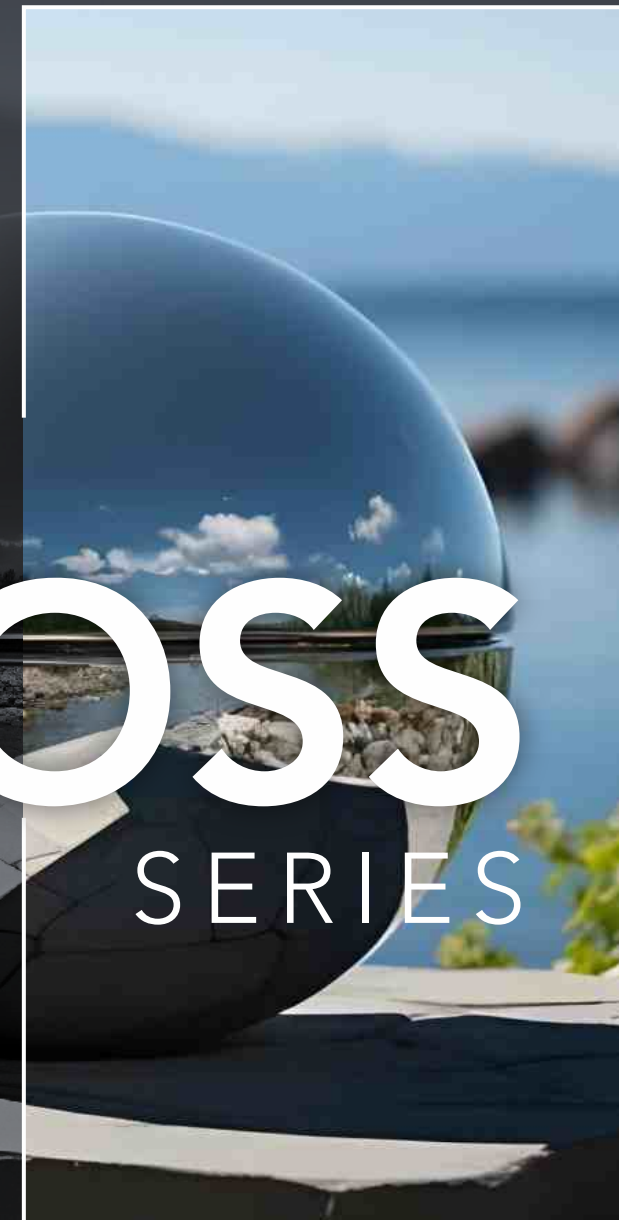

SUPER HIGH GLOSS SERIES



Size:
600x1200mm

Finish:
SUPER HIGH GLOSS



GRANITO BLACK



RANDOM 5

SUPER HIGH GLOSS

SERIES

Size:
600x1200mm

Finish:
SUPER HIGH GLOSS



GRANITO BLUE



RANDOM 5

SUPER HIGH GLOSS SERIES



Size:
600x1200mm

Finish:
SUPER HIGH GLOSS



GRANITO BROWN



RANDOM 5

SUPER HIGH GLOSS

SERIES




Size:
600x1200mm

Finish:
SUPER HIGH GLOSS



SERENA BLACK

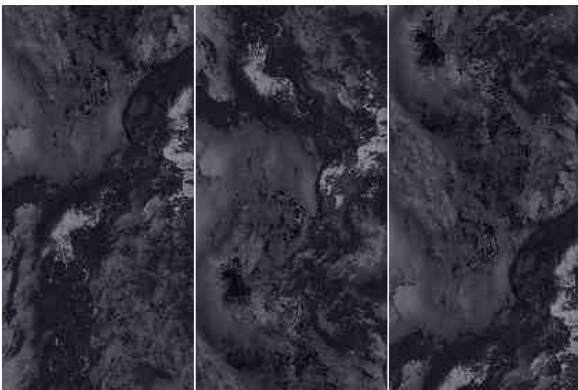

RANDOM 3

SUPER HIGH GLOSS



SERIES

Size:
600x1200mm

Finish:
SUPER HIGH GLOSS



SERENA BLUE

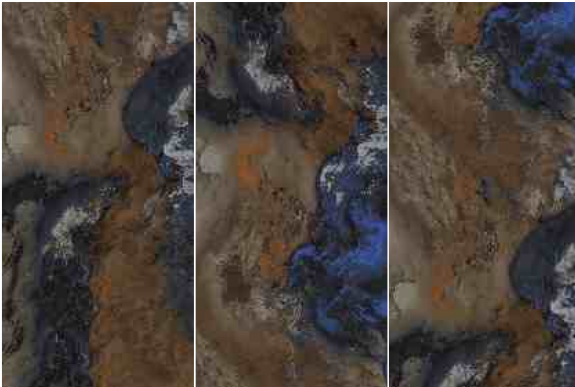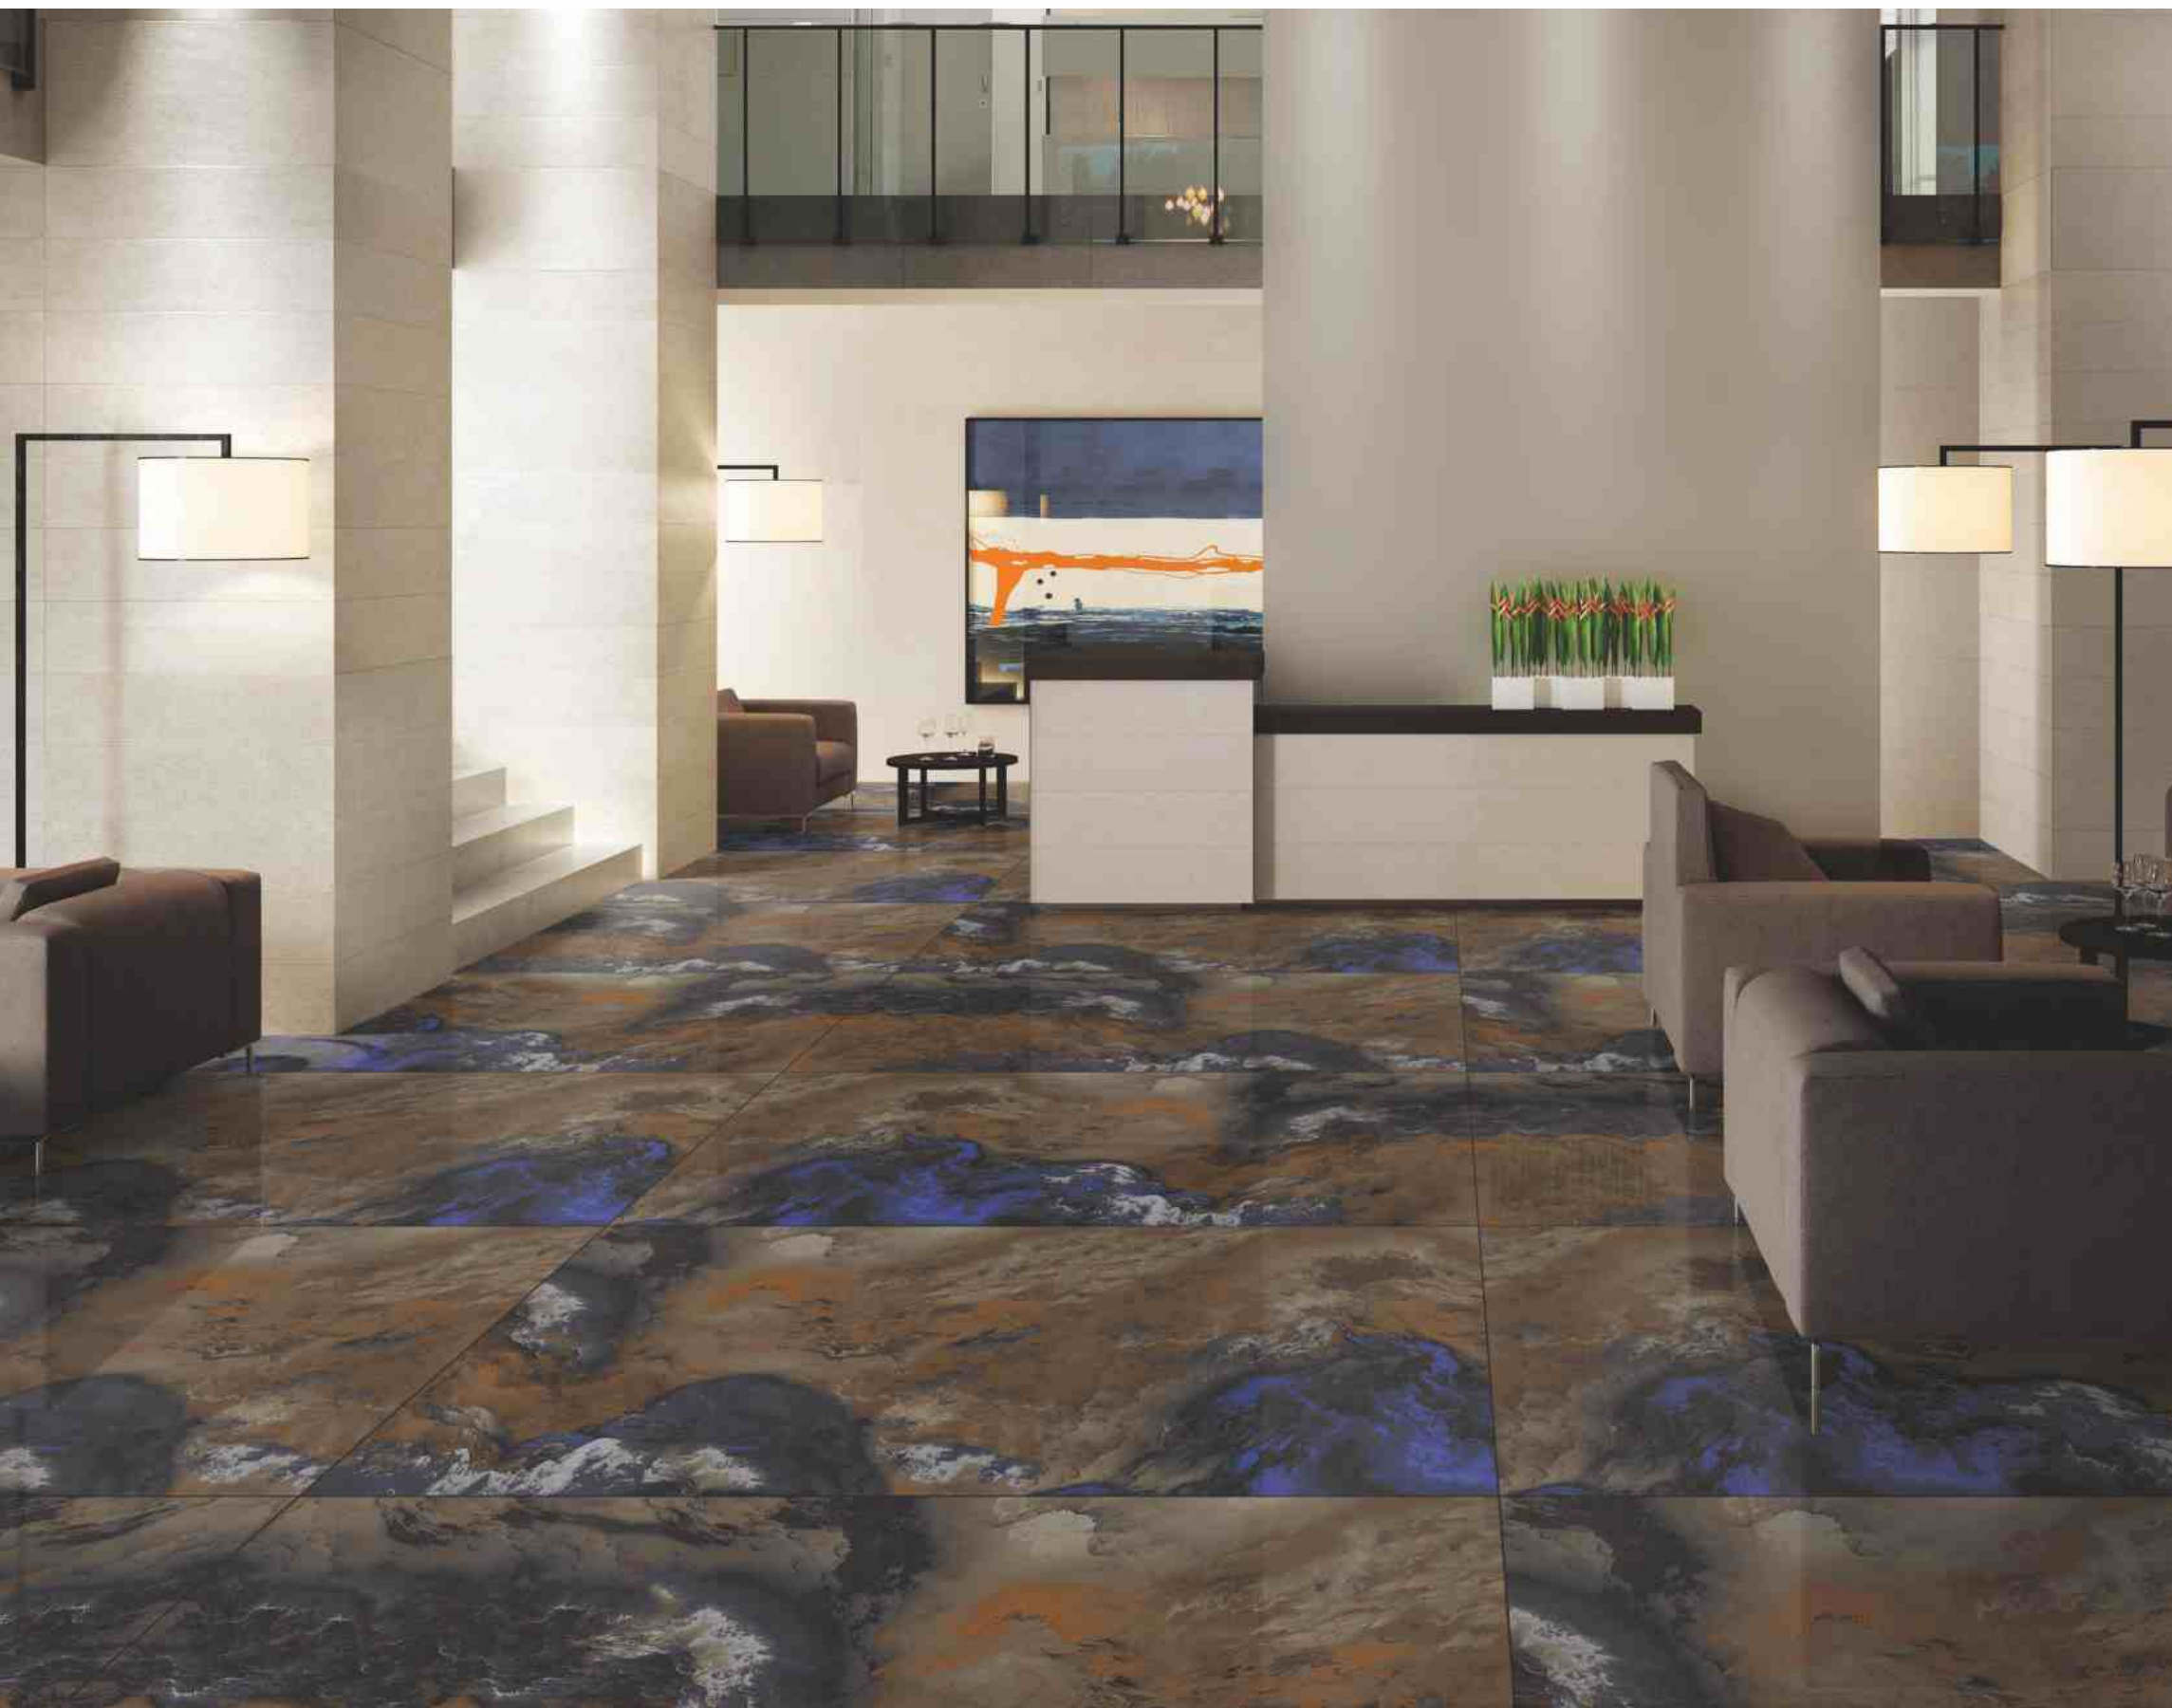


RANDOM 3


DESIGN, PATTERN & SHADE VARIATION GUIDE

Current development efforts have made Ceramic tiles to resemble and look authentically identical to natural materials (Stone, Wood, Fabric), and it has become increasingly difficult in many cases, to distinguish between the tow.


Recognizing this situation, it is necessary to be informed on the grade of Design & Pattern variation that is expected form these products. as a general reference the Design & Pattern guide below classifies a scale of ranges according to the degree of the variation.




V1 Uniform Appearance



V2 Slight Variation



V3 Moderate Variation



V4 Substantial Variation

THE CLASSIFICATION IS AS FOLLOW:

V1 Minimal Variation **V2** Slight Variation **V3** Random Variation **V4** Substantial Variation

HIGH DEFINITION IMAGE

While Laying the tiles please follow the arrow Mark on the back of the tiles For removing the wax from the surface of the tiles please use the soft cotton cloth for rubbing white any boric/talc powder

TEN COMMANDMENTS FOR LAYING TILES

1. Surface should be cleaned properly before installation.
2. Tiles should be segregated according to batch no. & manufacturing date
3. Dry fixing : lay the tiles in the desired patterns, shades and signs etc. before final laying.
4. Fixing by good quality tile-adhesive or with 1:4 cement & sand mortar.
5. Use of 2 to 5 mm SPACERS is recommended.
6. Do not use an iron hammer or some heavy material to press the tiles.
7. After 48 hours for bed curing, fill the joints with desired grouts.
8. Clean tiles with detergent powder or soap.
9. Cover the surface with plastic sheet / POP until it becomes ready for use.

TECHNICAL SPECIFICATION



TECHNICAL SPECIFICATION OF GVT

SIZE	Pcs. / Box	Coverage Area / Box
600x1200mm	2 Pcs	1.44 sq. mtr.

CHARACTERISTIC	International Standards Group B1a- ISO 13006 Annx. G.	SONATA MEAN VALUE	TEST METHOD
Deviation In Length	± 0.60%	± 0.10%	ISO-10545-2
Deviation In Thickness	± 5.00%	± 4.00%	ISO-10545-2
Straightness Of Sides	± 0.50%	± 0.10%	ISO-10545-2
Rectangularity	± 0.60%	± 0.10%	ISO-10545-2
Surface Flatness	± 0.50%	± 0.15%	ISO-10545-2
Surface Quality (%)	Min. 6	Min. 6	ISO-10545-2
Scratch Hardness of Surface (Moh's scale)	A minimum of 95% of the tiles shall be free from visible defects	A minimum of 95% of the tiles shall be free from visible defects	ISO-10545-2
Modulus of Rupture	> 35N/mm3	> 38N/mm2	ISO-10545-4
Breaking Strength	> 1300 N	> 1500 N	ISO-10545-4
Water Absorption	< 0.50%	< 0.08%	ISO-10545-3
Stain Resistance	Stain Resistant	Stain Resistant	ISO-10545-14
Chemical Resistance	No Damage	No Damage	ISO-10545-13
Thermal Expansion	< 9 x 10-6	< 7 x 10-6	ISO-10545-8
Moisture Expansion	Nil	Nil	ISO-10545-10
Thermal Shock Resistance	No Damage	No Damage	ISO-10545-9
Resistance to Surface Abrasion	Manu. to State Abrasion Class	PEI class 3-5	ISO-10545-7
Bulk Density	> 2.00	> 2.20	ISO-10545-3

Note: Colour Shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However, the company reserve the right to change the specifications without prior notice. Sometime variations in shade or size being inherent to ceramic industry may occur. Before fixing, we advise you to follow the fixing instructions on the cartons of the tiles as no responsibility can be accepted by the company once the tiles have been fixed.



SONATA CERAMICA PVT. LTD.

Near Sabar Dairy, Talod Road, At. & Po.: Gadhoda,
Ta. Himmatnagar - 383 001.(S.K.), Gujarat. India

Mob.: +91 98240 24333.

☎ .: +91 90330 24333

E-mail: info@sonatatile.com



visit us at:

www.sonatatile.com



www.ideationdesign.in