Wood Punch & Ruston SERIES

RUSTIC FINISH





600x600mm

GLAZED VITRIFIED TILES



600X 600MM

NATURAL ELEGANCE

IN 600x600mm

Discover the warmth of nature blended with modern craftsmanship. Our Premium Wood Collection offers exceptional durability and visual appeal, perfect for adding charm and sophistication to any space.

FEATURE & APPLICATION



FEATURE























APPLICATION





































ELEGANCE IN EVERY DETAIL

INDEX

Discover the timeless beauty of the Wood Punch Series. Designed to mimic the luxurious charm of natural punch, these 600x600mm tiles blend sophistication with durability. Perfect for modern interiors, they bring a refined touch to any space.



























ELEGANCE IN EVERY DETAIL

INDEX

Discover the timeless beauty of the Ruston Series. Designed to mimic the luxurious charm of natural punch, these 600x600mm tiles blend sophistication with durability. Perfect for modern interiors, they bring a refined touch to any space.







Discover

Punch-In Perfection

Step into a world where innovation meets elegance.

Our punch-in tile collection offers effortless installation, precise alignment, and a flawless finish—designed for those who demand both style and simplicity.







MOUNTAIN NATURAL






MOUNTAIN TEAK





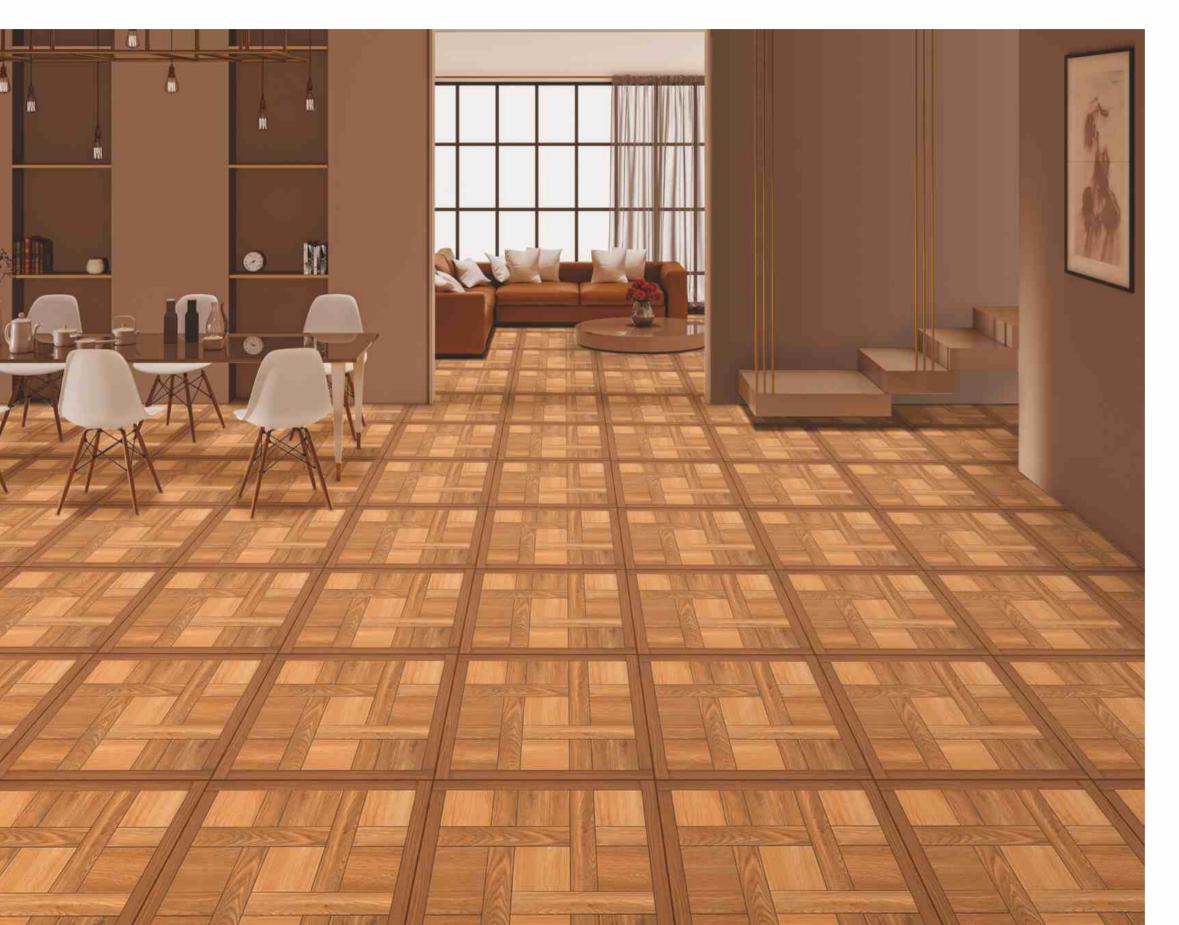

MOUNTAN ANTIQUE





Discover Punch-In Perfection

Step into a world where innovation meets elegance.

Our punch-in tile collection offers effortless installation, precise alignment, and a flawless finish—designed for those who demand both style and simplicity.







PLANK NATURAL








BEAST NATURAL





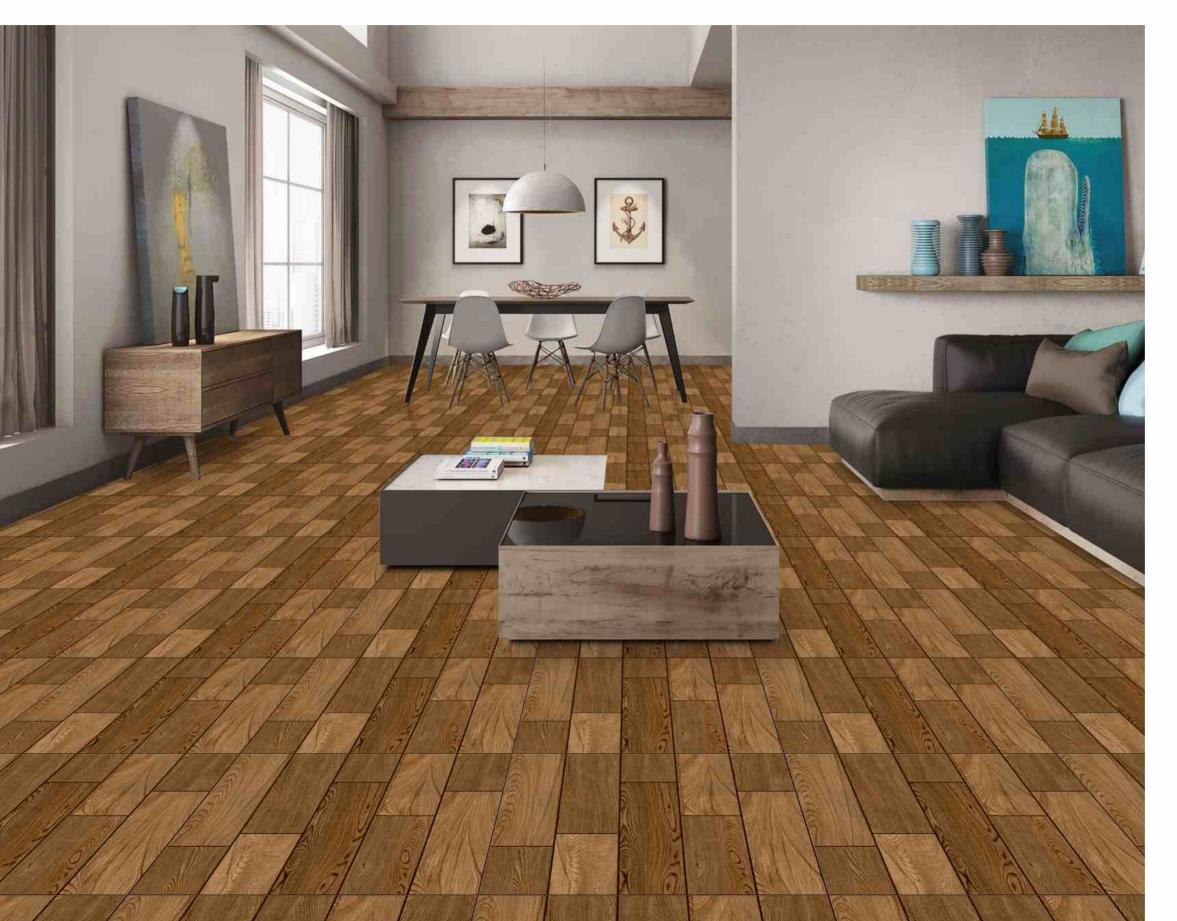


DENISH BEACH





DENISH GOLD



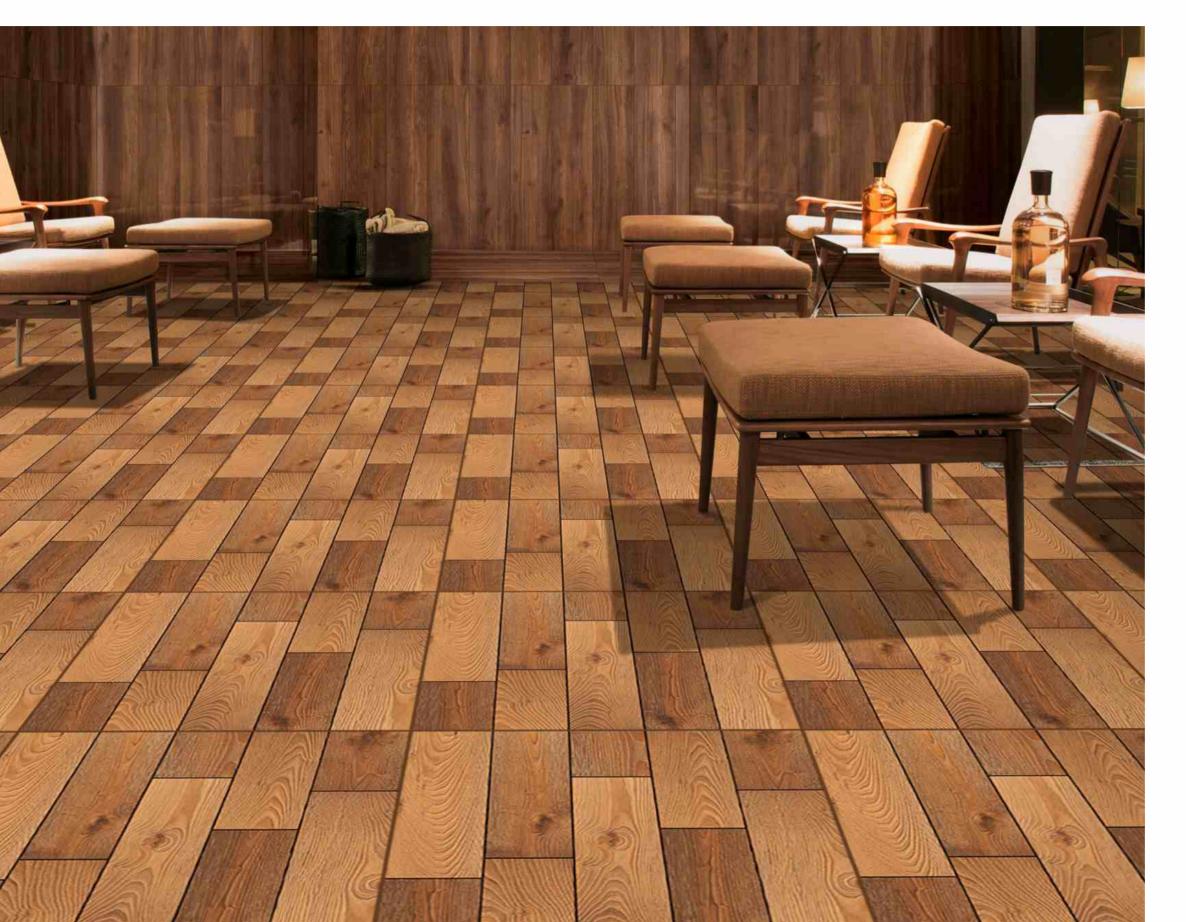

LOMBAK TEAK





Discover


Punch-In Perfection

Step into a world where innovation meets elegance.

Our punch-in tile collection offers effortless installation, precise alignment, and a flawless finish—designed for those who demand both style and simplicity.





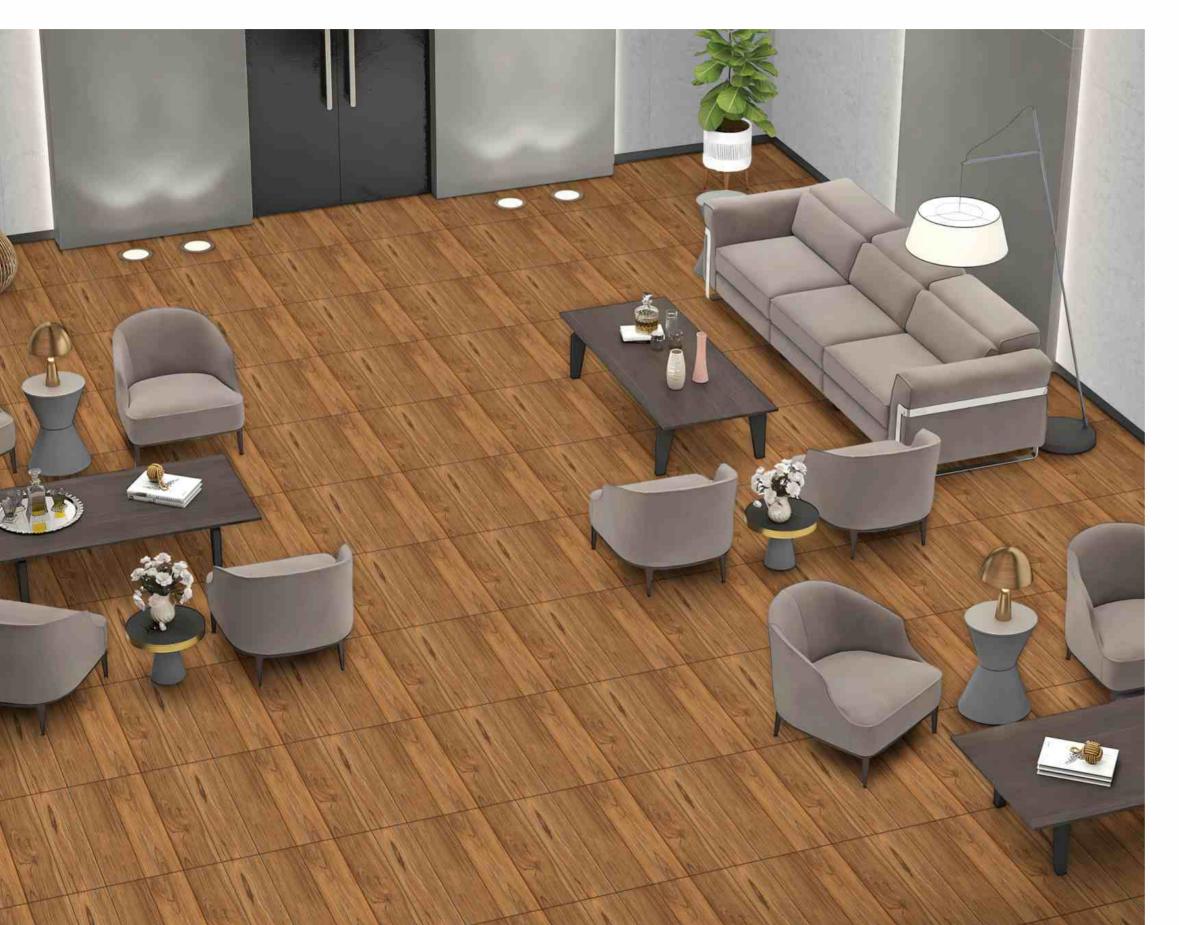

SPANISH WALNUT







TANISQE GOLD







AGATHA BROWN







PEAR WOOD








LAMINOUS WOOD



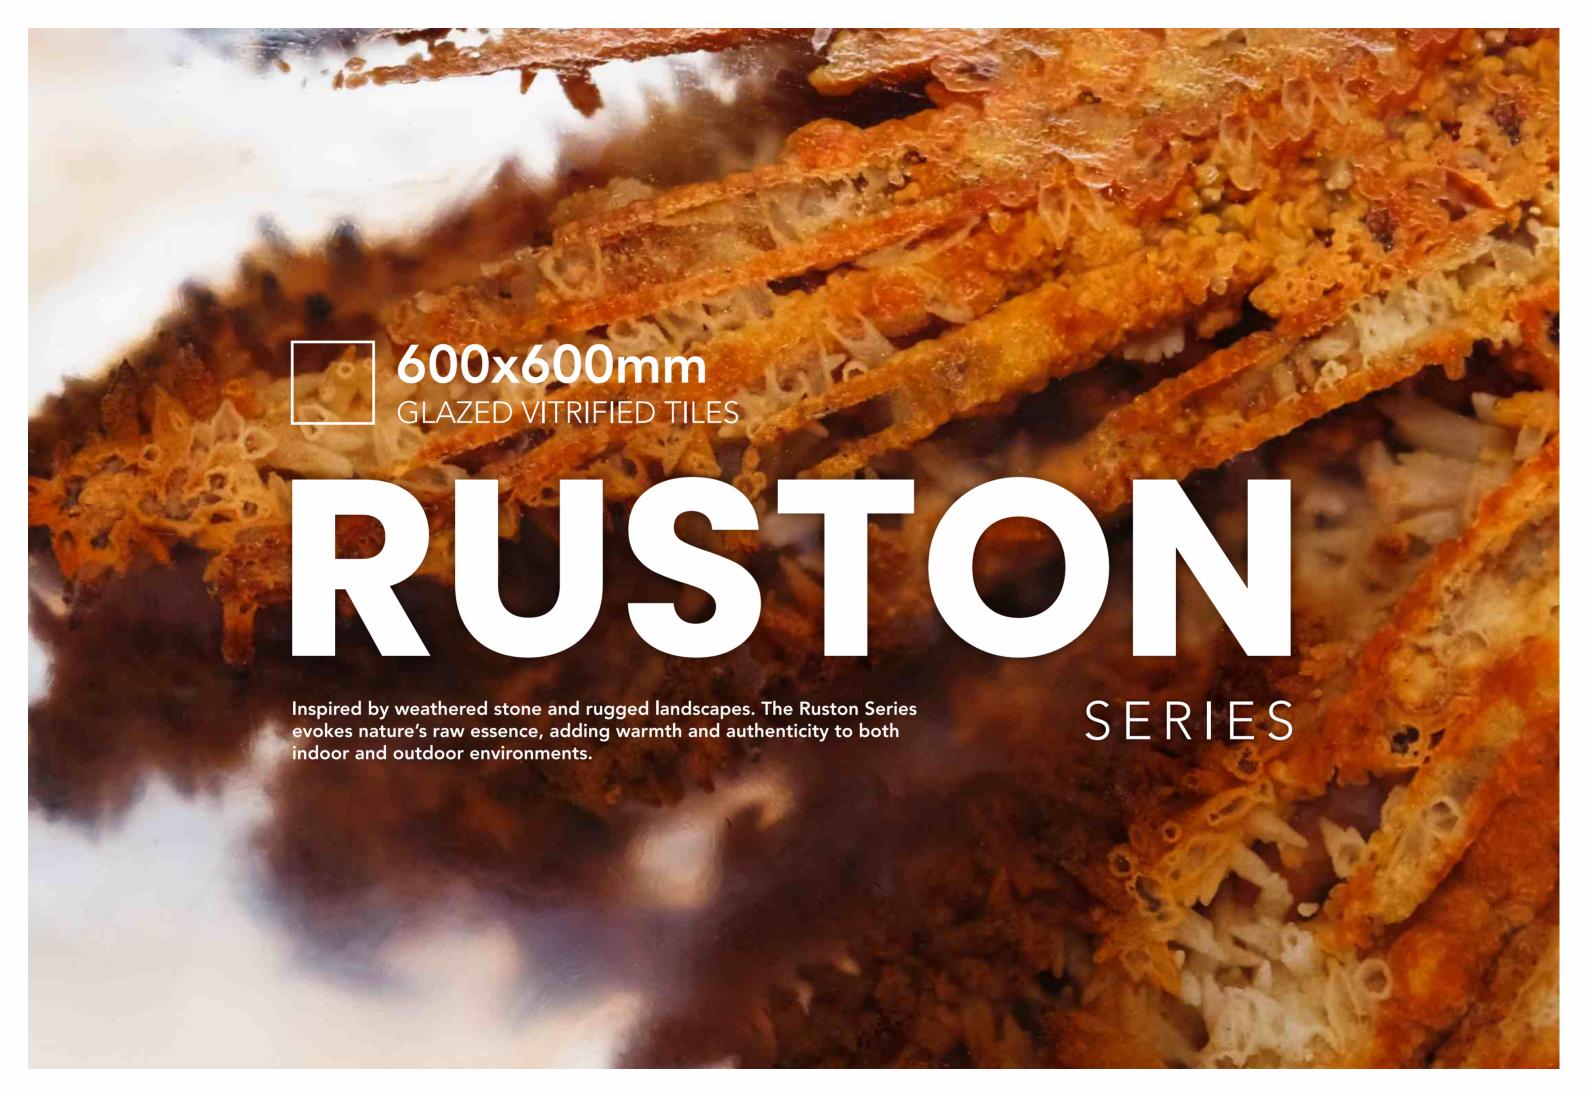







GRESS DUE BEIGE







GRESS DUE BROWN








GRESS DUE PEARL







GRESS DUE GREY









GRIGIO BEIGE





RANDOM 3






GRIGIO BROWN





RANDOM 3

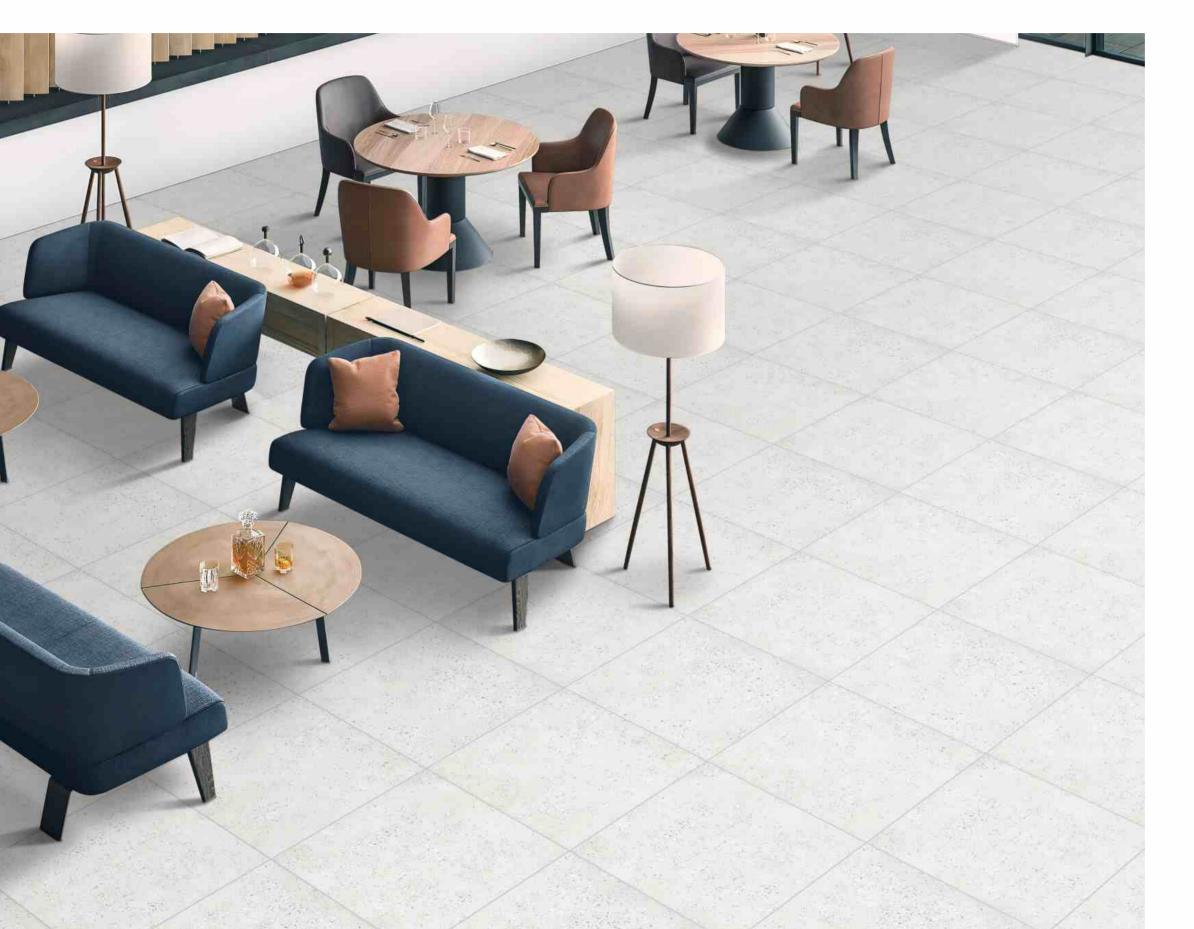


GRIGIO PEARL






RANDOM 3



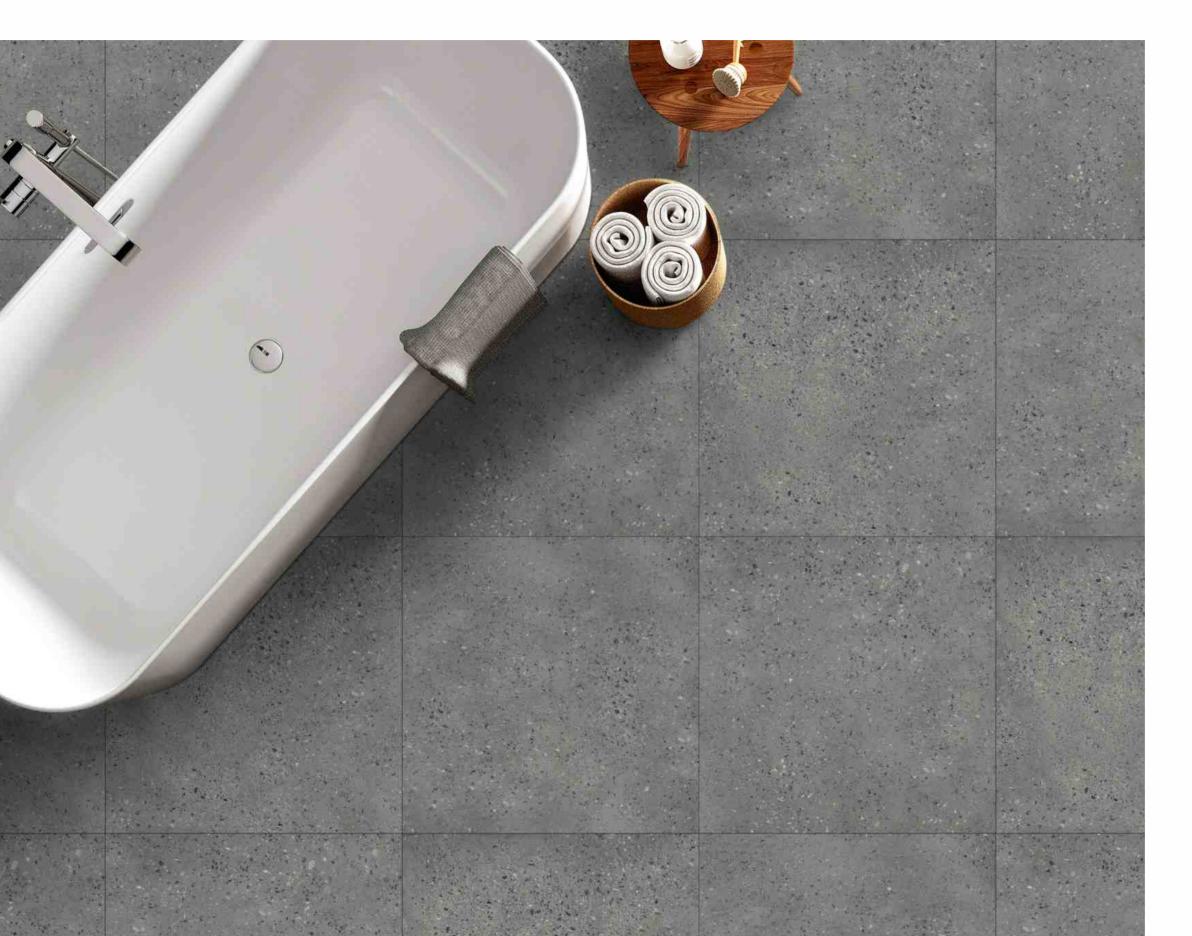

GRIGIO GREY

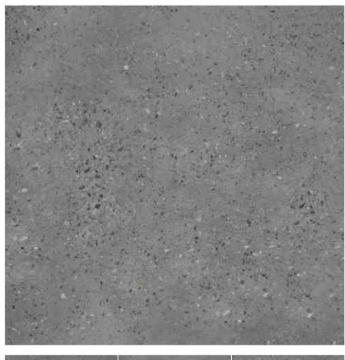



RANDOM 3








LAVA STONE





RANDOM 5



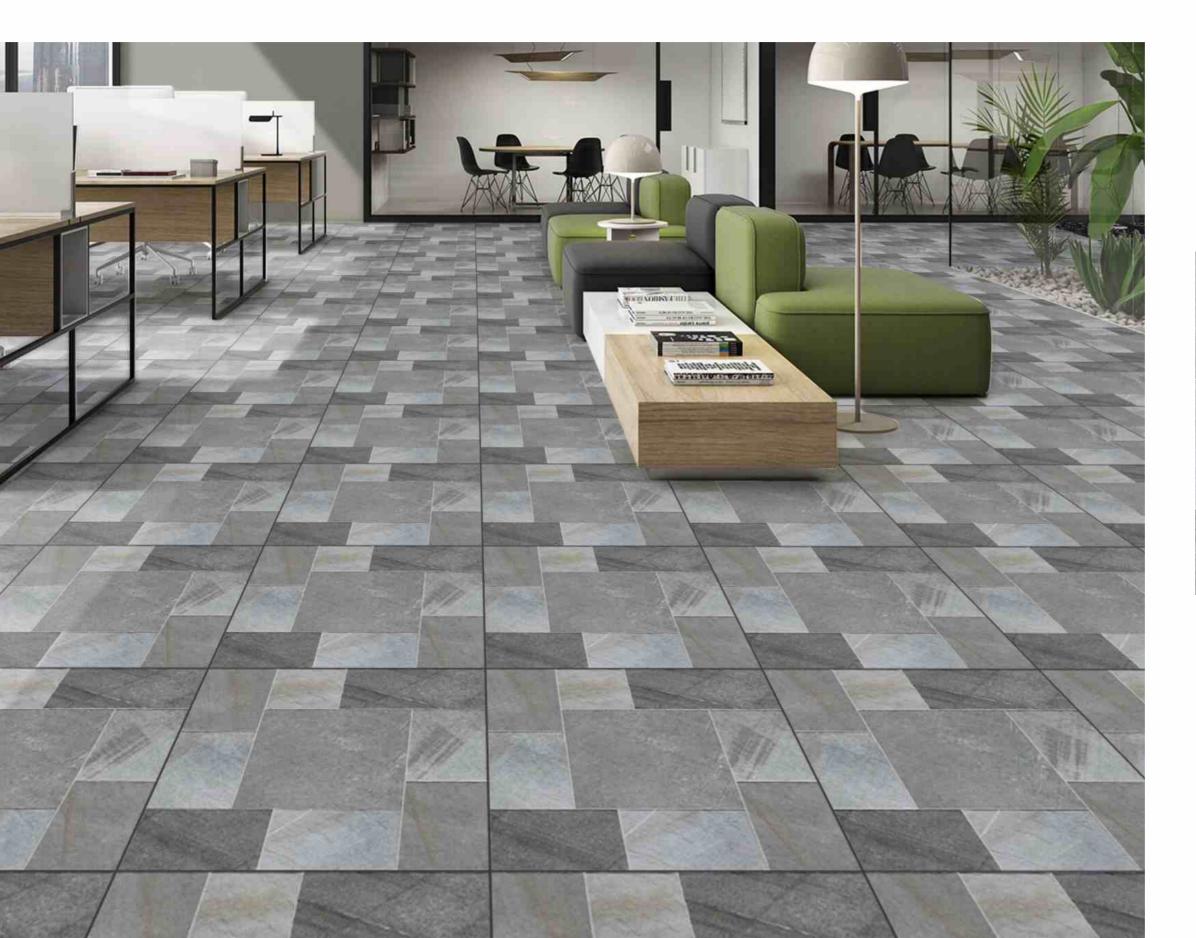

MOON STONE



RANDOM 5






GOLDY STONE



RANDOM 5

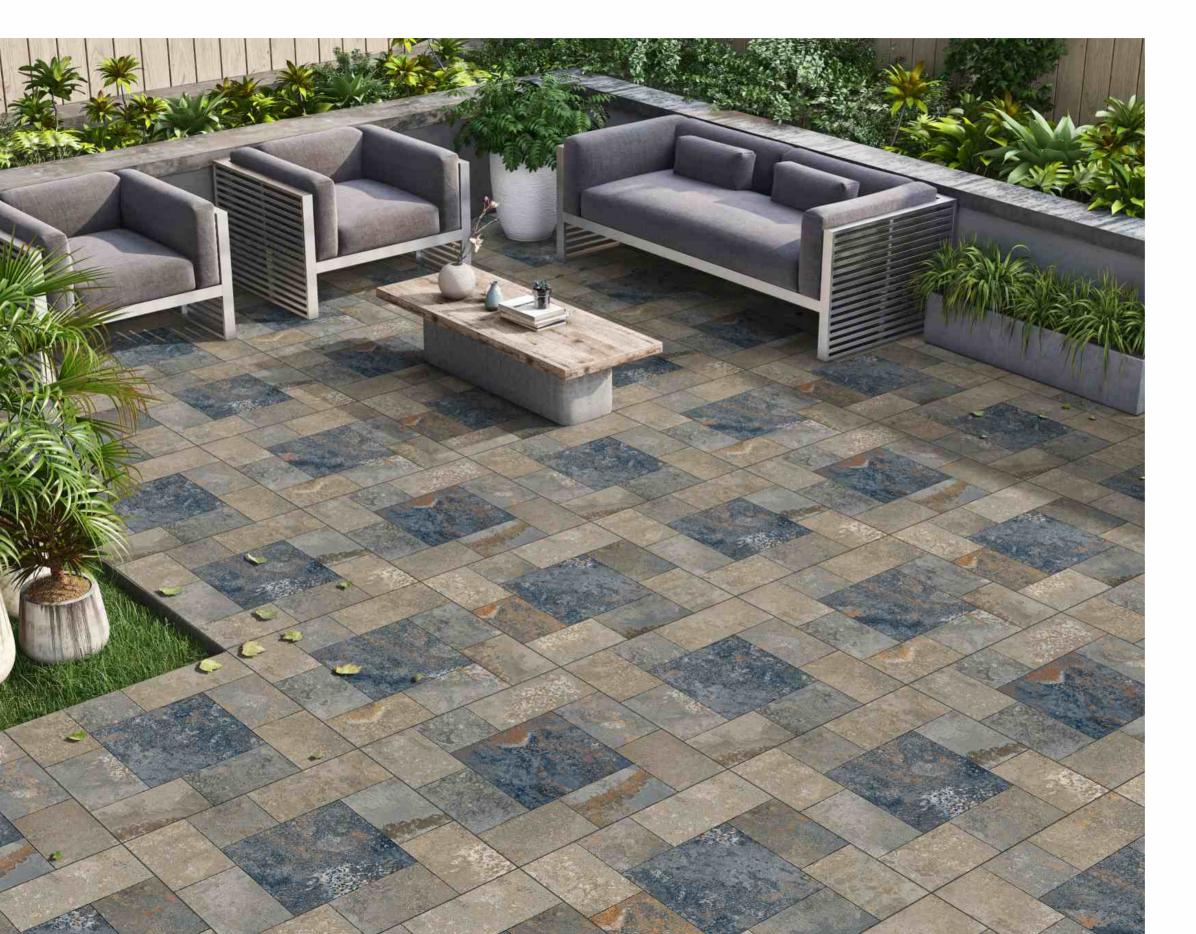

NEBULA STONE





RANDOM 5





HAMMER STONE





RANDOM 5





JAX STONE












HIMALAYA COTTO










DESIGN, PATTERN & SHADE VARIATION GUIDE


Current development efforts have made Ceramic tiles to resemble and look authentically identical to natural materials (Stone, Wood, Fabric), and it has become increasingly difficult in many cases, to distinguish between the tow.

Recognizing this situation, it is necessary to be informed on the grade of Design & Pattern variation that is expected form these products, as a general reference the Design & Pattern guide below classifies a scale of ranges according to the degree of the variation.




V1 Uniform Appearance










V3 Moderate Variation



V4 Substantial Variation

THE CLASSIFICATION IS AS FOLLOW:

V1 Minimal Variation

V2 Slight Variation **V3** Random Variation

V4 Substantial Variation

HIGH DEFINITION IMAGE

While Laying the tiles please follow the arrow Mark on the back of the tiles For removing the wax from the surface of the tiles please use the soft cotton cloth for rubbing white any boric/talc powder

TEN COMMANDMENTS FOR LAYING TILES

- 1. Surface should be cleaned properly before installation.
- 2. Tiles should be segregated according to batch no. & manufacturing date
- 3. Dry fixing: lay the tiles in the desired patterns, shades and signs etc. before final laying.
- 4. Fixing by good quality tile-adhesive or with 1:4 cement & sand mortar.
- 5. Use of 2 to 5 mm SPACERS is recommended.
- 6. Do not use an iron hammer or some heavy material to press the tiles.
- 7. After 48 hours for bed curing, fill the joints with desired grouts.
- 8. Clean tiles with detergent powder or soap.
- 9. Cover the surface with plastic sheet / POP until it becomes ready for use.

TECHNICAL SPECIFICATION



TECHNICAL SPECIFICATION OF GVT

SIZE	Pcs. / Box	Coverage Area / Box	
600x600mm	4 Pcs	1.44 sq. mtr.	

CHARACTERISTIC	International Standards Group Bla- ISO 13006 Annx. G.	SONATA MEAN VALUE	TEST METHOD
Deviation In Length	± 0.60%	± 0.10%	ISO-10545-2
Deviation In Thickness	± 5.00%	± 4.00%	ISO-10545-2
Straightness Of Sides	± 0.50%	± 0.10%	ISO-10545-2
Rectangularity	± 0.60%	± 0.10%	ISO-10545-2
Surface Flatness	± 0.50%	± 0.15%	ISO-10545-2
Surface Quality (%)	Min. 6	Min. 6	ISO-10545-2
Scratch Hardness of Surface	A minimum of 95% of the tiles shall be	A minimum of 95% of the tiles shall be	100 105/5 2
(Moh's scale)	free from visible defects	free from visible defects	ISO-10545-2
Modulus of Rupture	> 35N/mm3	> 38N/mm2	ISO-10545-4
Breaking Strength	> 1300 N	> 1500 N	ISO-10545-4
Water Absorption	< 0.50%	< 0.50%	ISO-10545-3
Stain Resistance	Stain Resistant	Stain Resistant	ISO-10545-14
Chemical Resistance	No Damage	No Damage	ISO-10545-13
Thermal Expansion	< 9 x 10-6	< 7 x 10-6	ISO-10545-8
Moisture Expansion	Nil	Nil	ISO-10545-10
Thermal Shock Resistance	No Damage	No Damage	ISO-10545-9
Resistance to Surface Abrasion	Manu. to State Abrasion Class	PEI class 3-5	ISO-10545-7
Bulk Density	> 2.00	> 2.20	ISO-10545-3

Note: Colour Shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However, the company reserve the right to change the specifications without prior notice. Sometime variations in shade or size being inherent to ceramic industry may occur. Before fixing, we advise you to follow the fixing instructions on the cartons of the tiles as no responsibility can be accepted by the company once the tiles have been fixed.



SONATA CERAMICA PVT. LTD.

Near Sabar Dairy, Talod Road, At. & Po.: Gadhoda, Ta. Himmatnagar - 383 001.(S.K.), Gujarat. India

Mob.: +91 98240 24333. **©** .: +91 90330 24333

E-mail: info@sonatatile.com





