

600x600mm
GLAZED VITRIFIED TILES



600X 600MM

NATURAL ELEGANCE

IN 600x600mm

Discover the warmth of nature blended with modern craftsmanship. Our Premium Wood Collection offers exceptional durability and visual appeal, perfect for adding charm and sophistication to any space.

FEATURE & APPLICATION



FEATURE

























APPLICATION
































ELEGANCE IN EVERY DETAIL

INDEX

Discover the timeless beauty of the Wooden Series. Designed to mimic the luxurious charm of natural wood, these 600x600mm tiles blend sophistication with durability. Perfect for modern interiors, they bring a refined touch to any space.

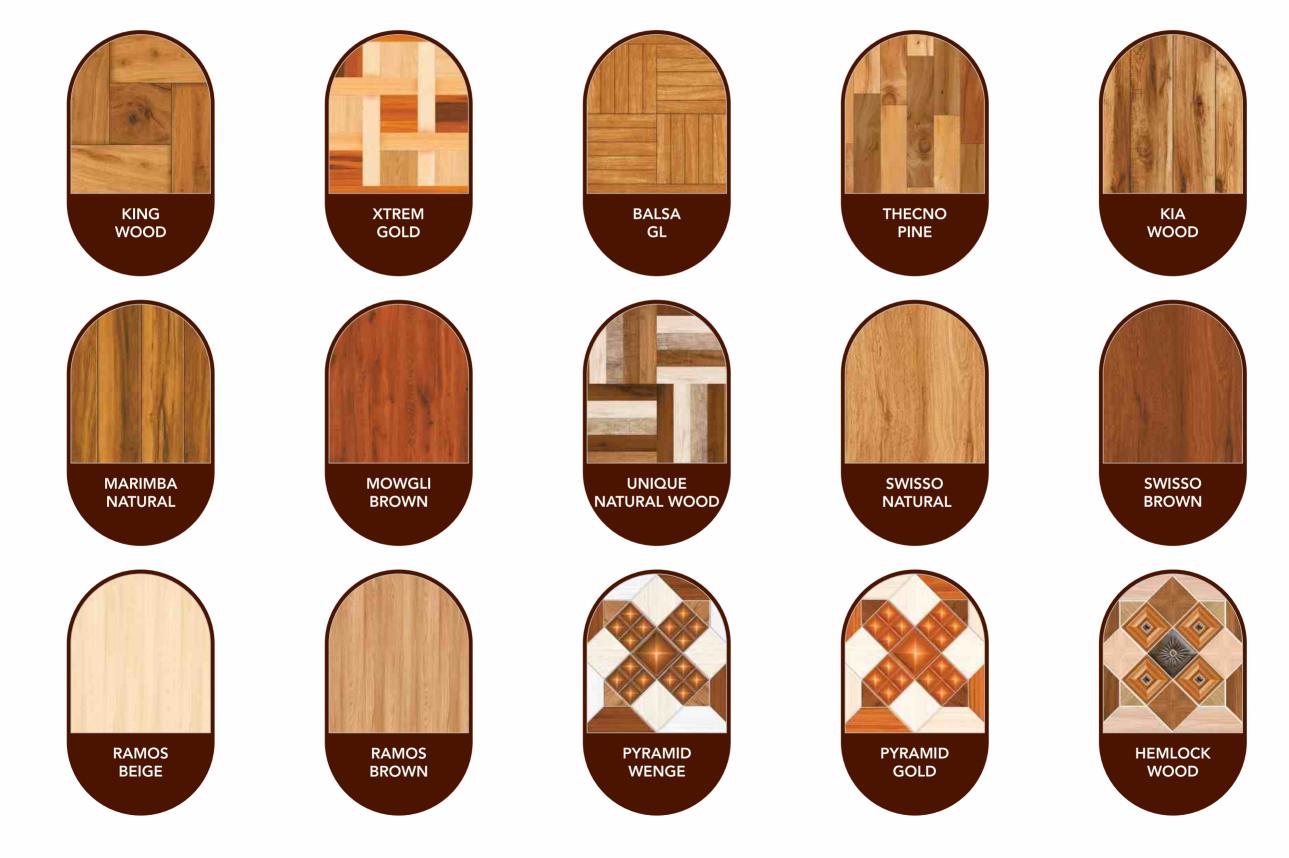

INDEX


























KING WOOD



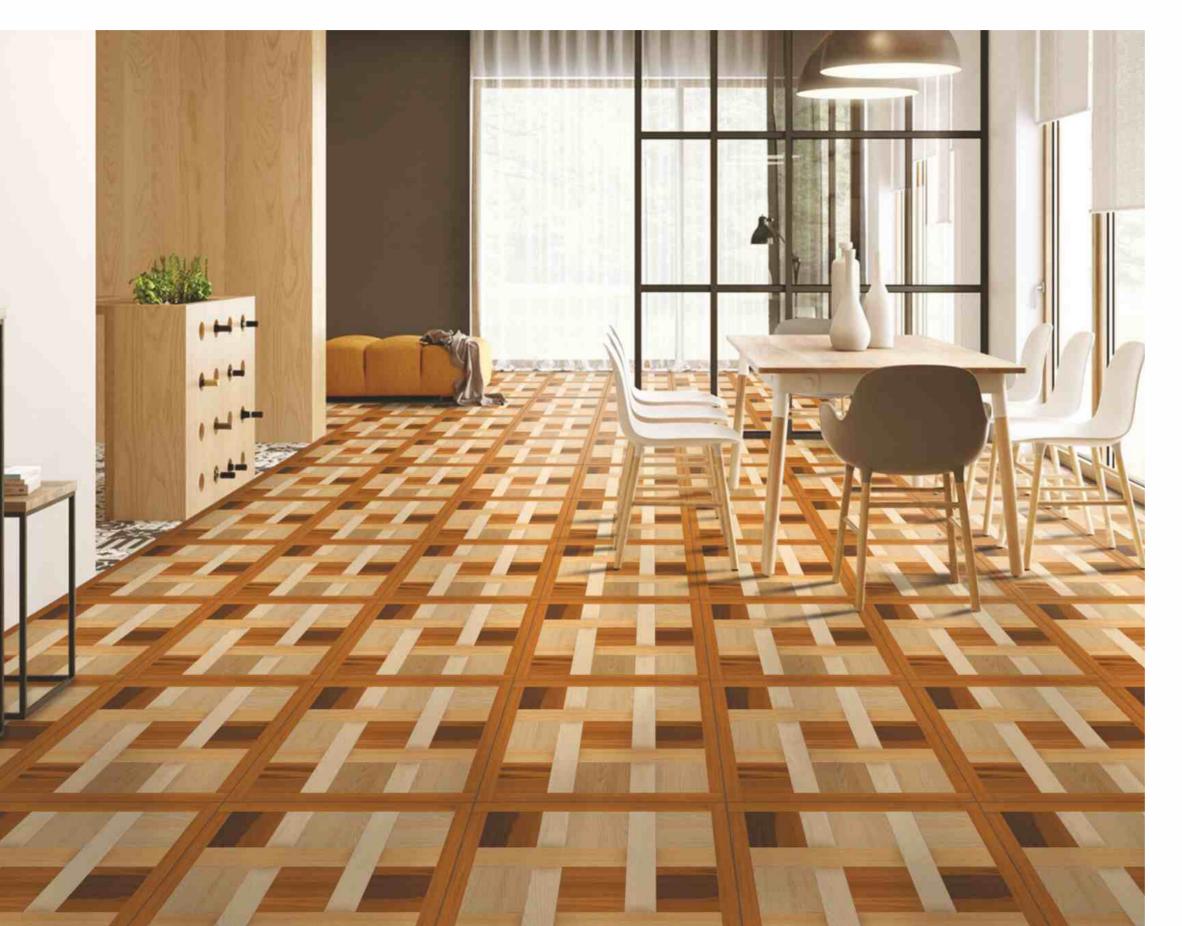


XTREM GOLD





BALSA GL

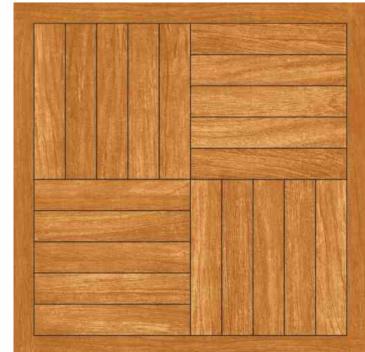



THECNO PINE






KIA WOOD






MARIMBA NATURAL



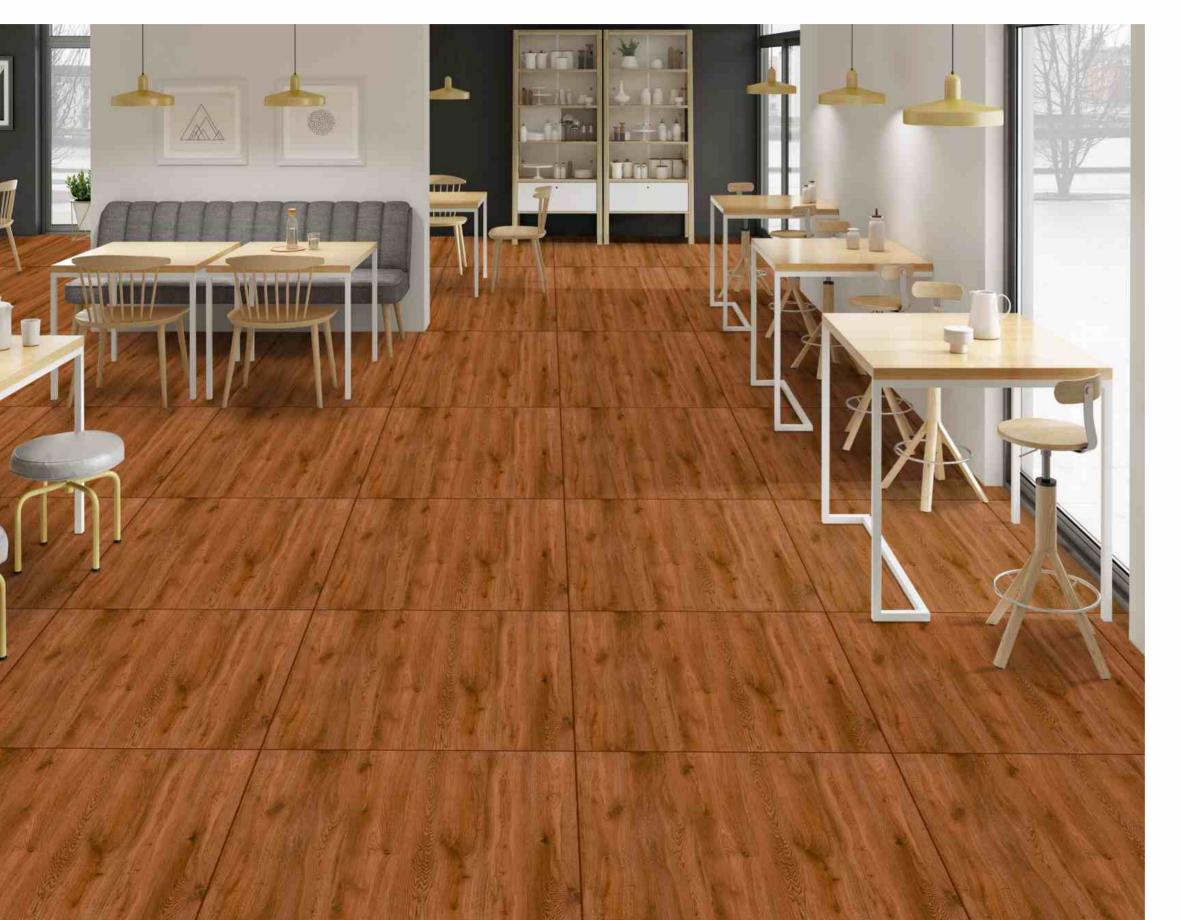

MOWGLI BROWN



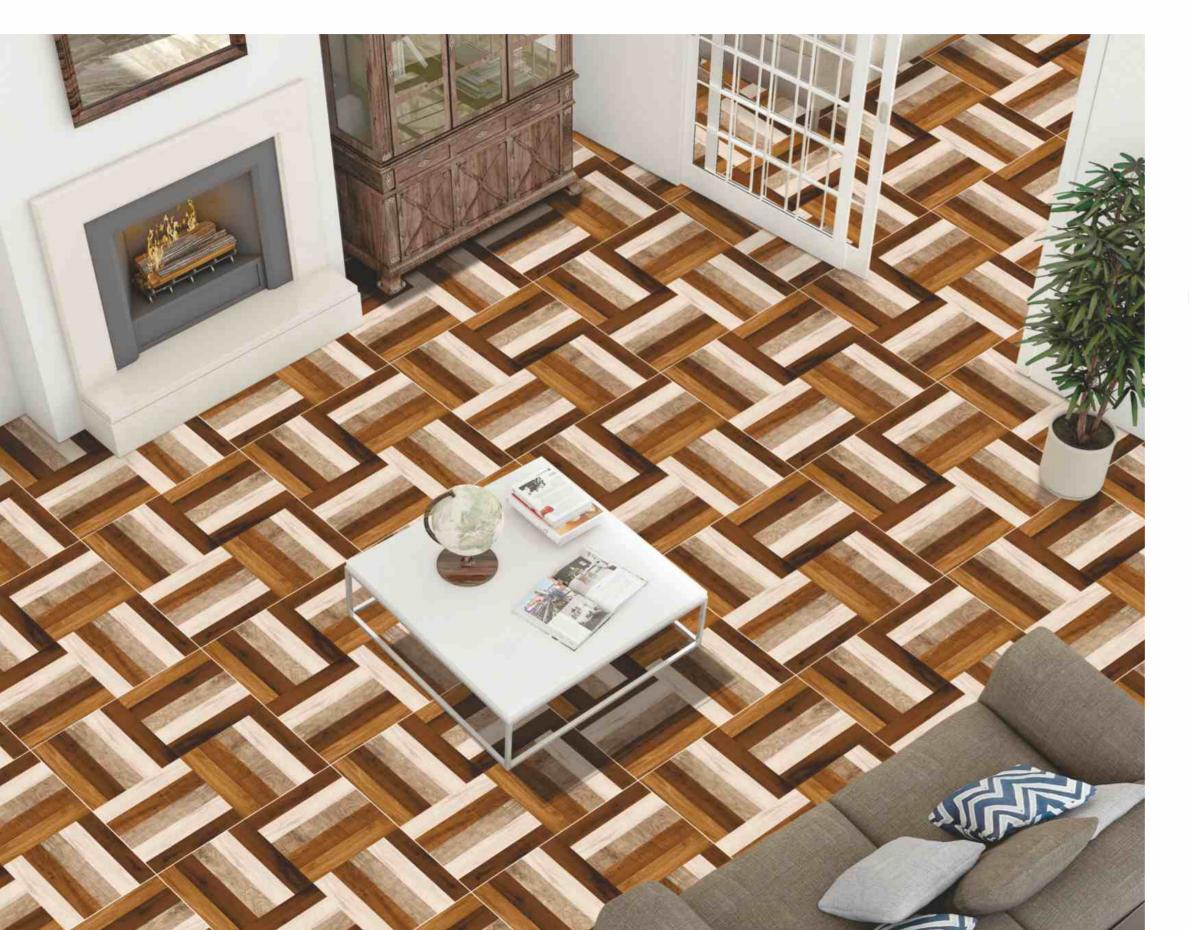

UNIQUE NATURAL WOOD





SWISSO NATURAL





Finish: MATT FINISH





SWISSO BROWN





RAMOS BEIGE





Finish: MATT FINISH





RAMOS BROWN





Finish: MATT FINISH





PYRAMIND WENGE






Finish: MATT FINISH





PYRAMIND GOLD

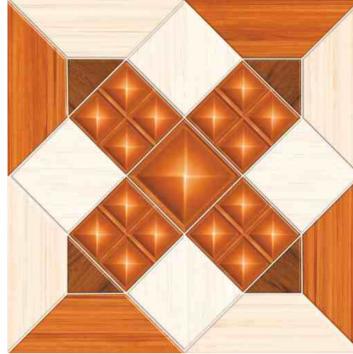




HEMLOCK WOOD





Finish: MATT FINISH



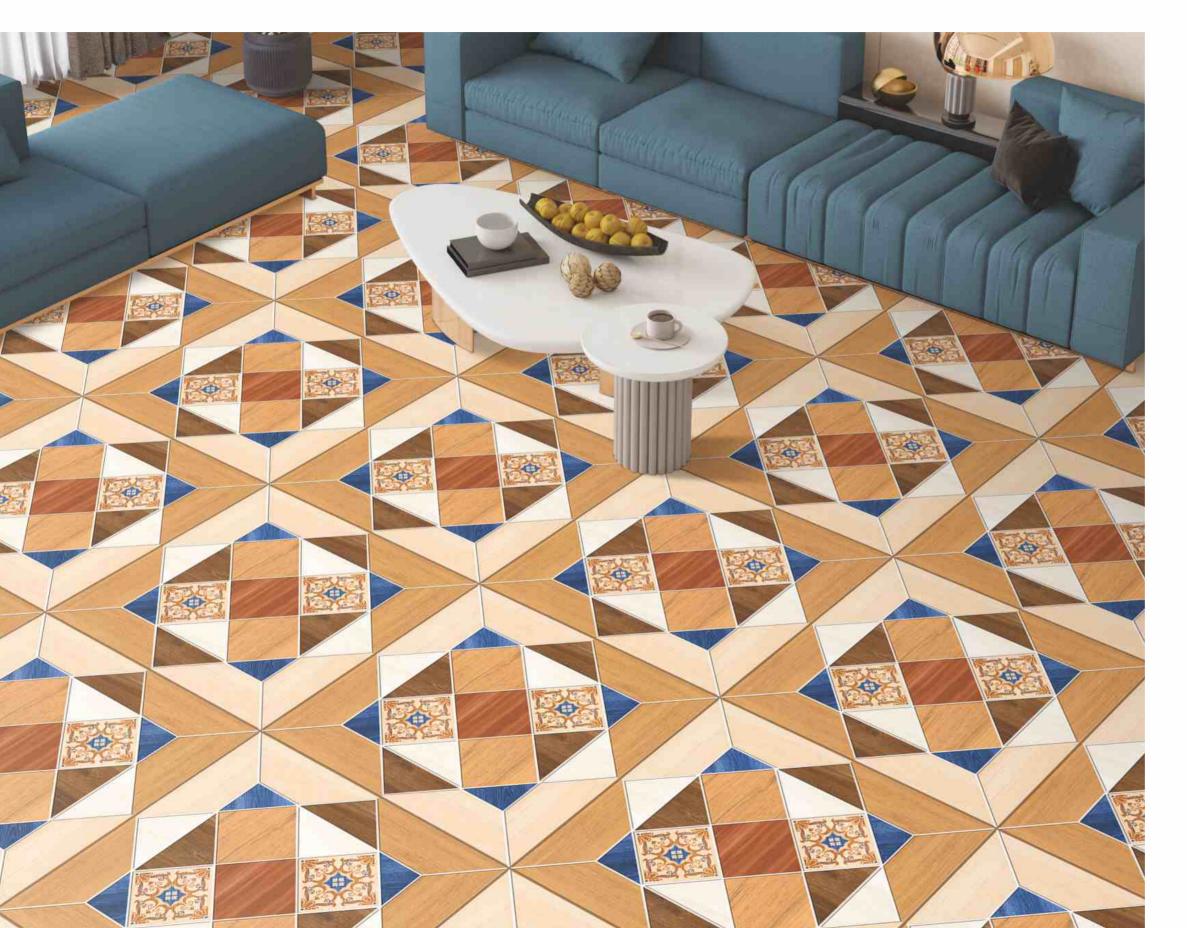


MODREN WOOD



Size: 600x600mm

Finish: MATT FINISH



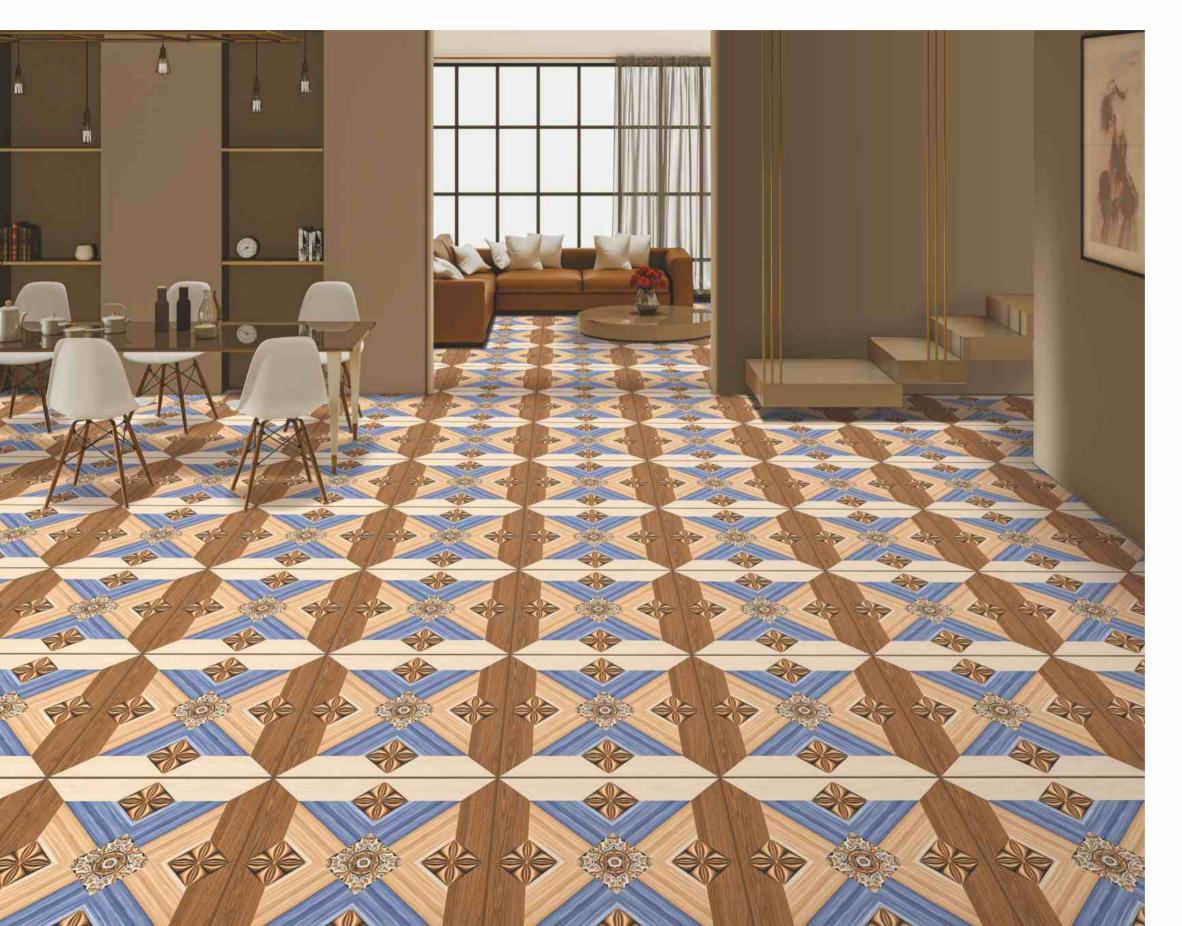


OPERA OAK





Finish: MATT FINISH



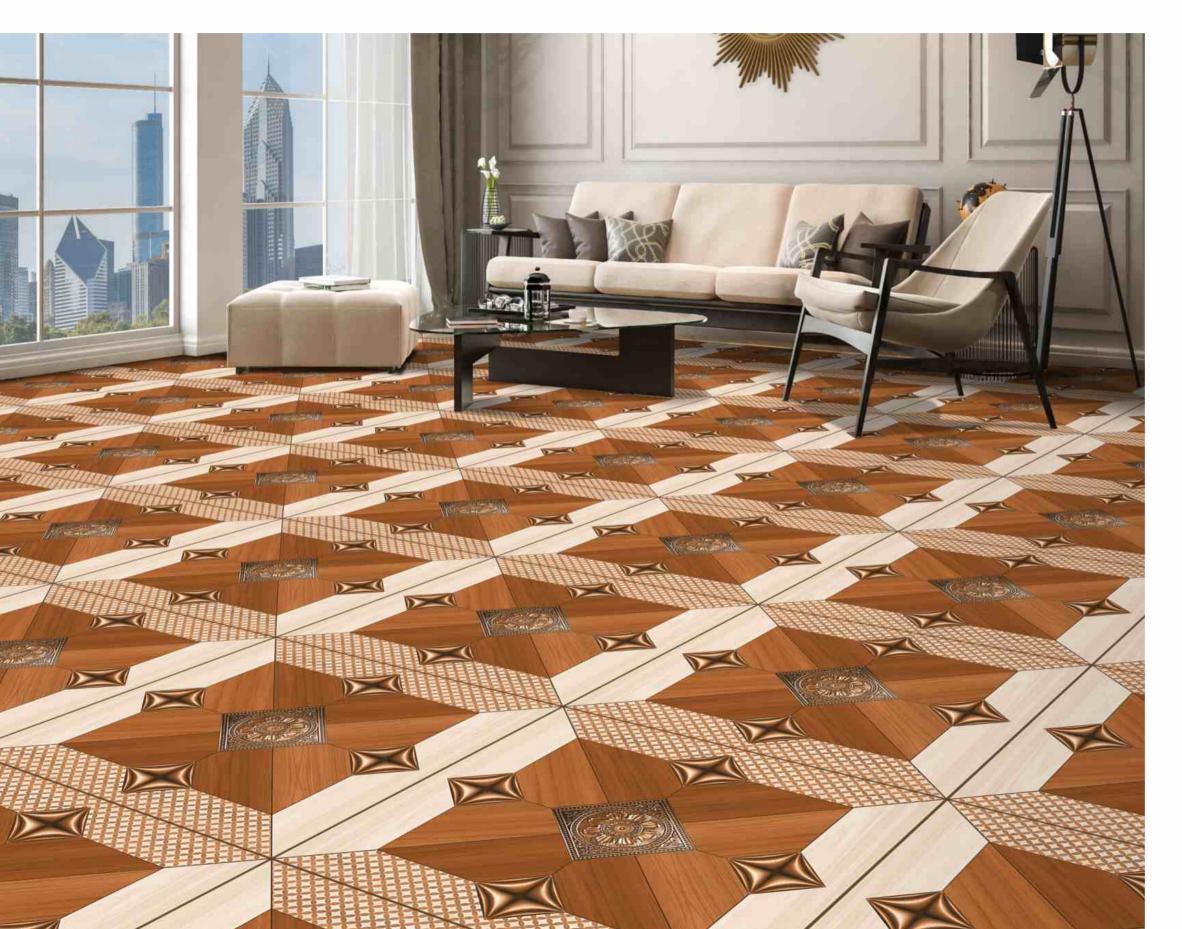



ARROW WOOD





STAR WOOD

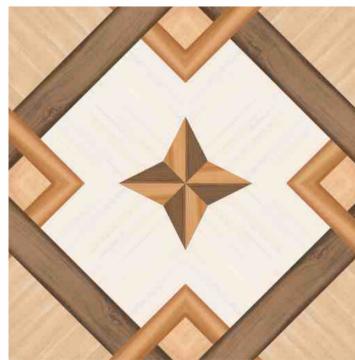

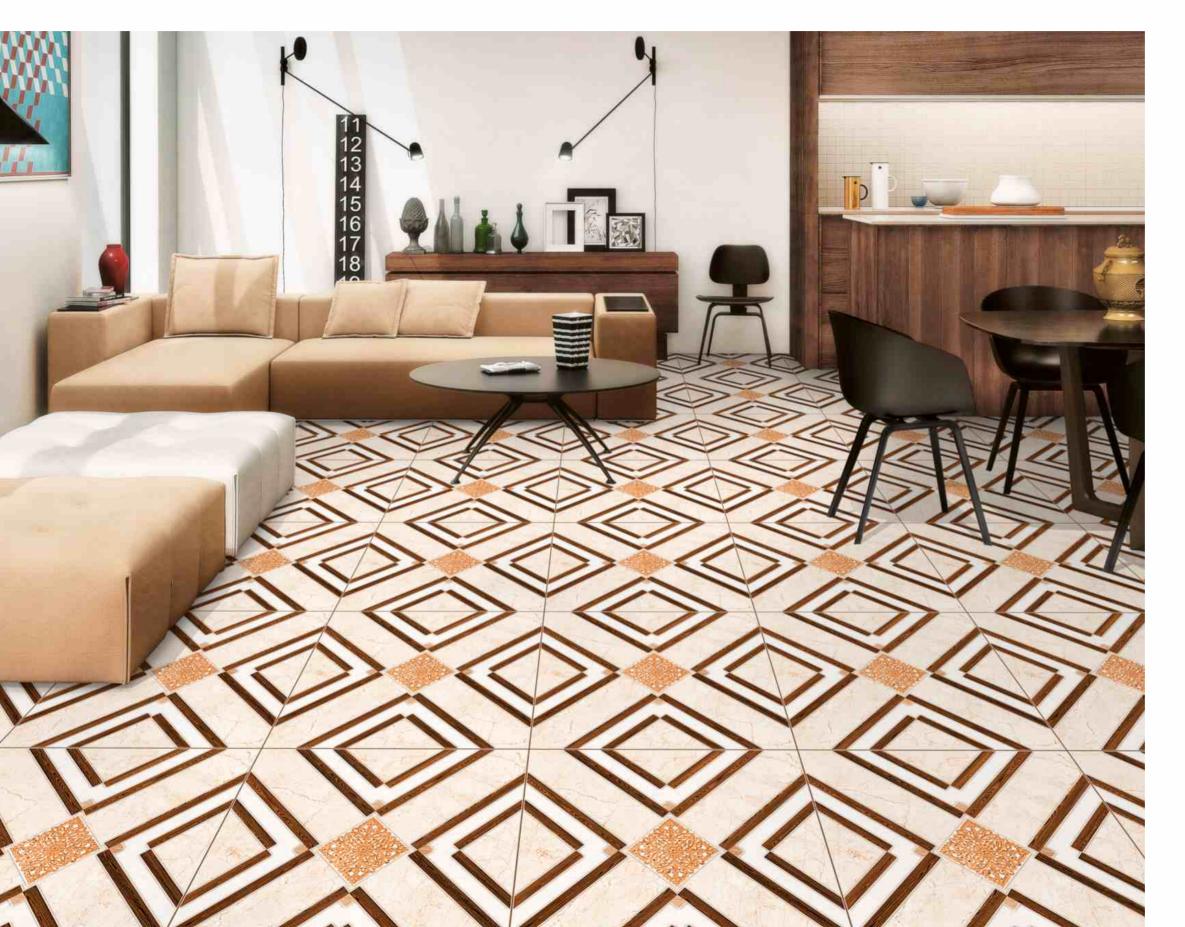


HARMONY WOOD





Finish: MATT FINISH



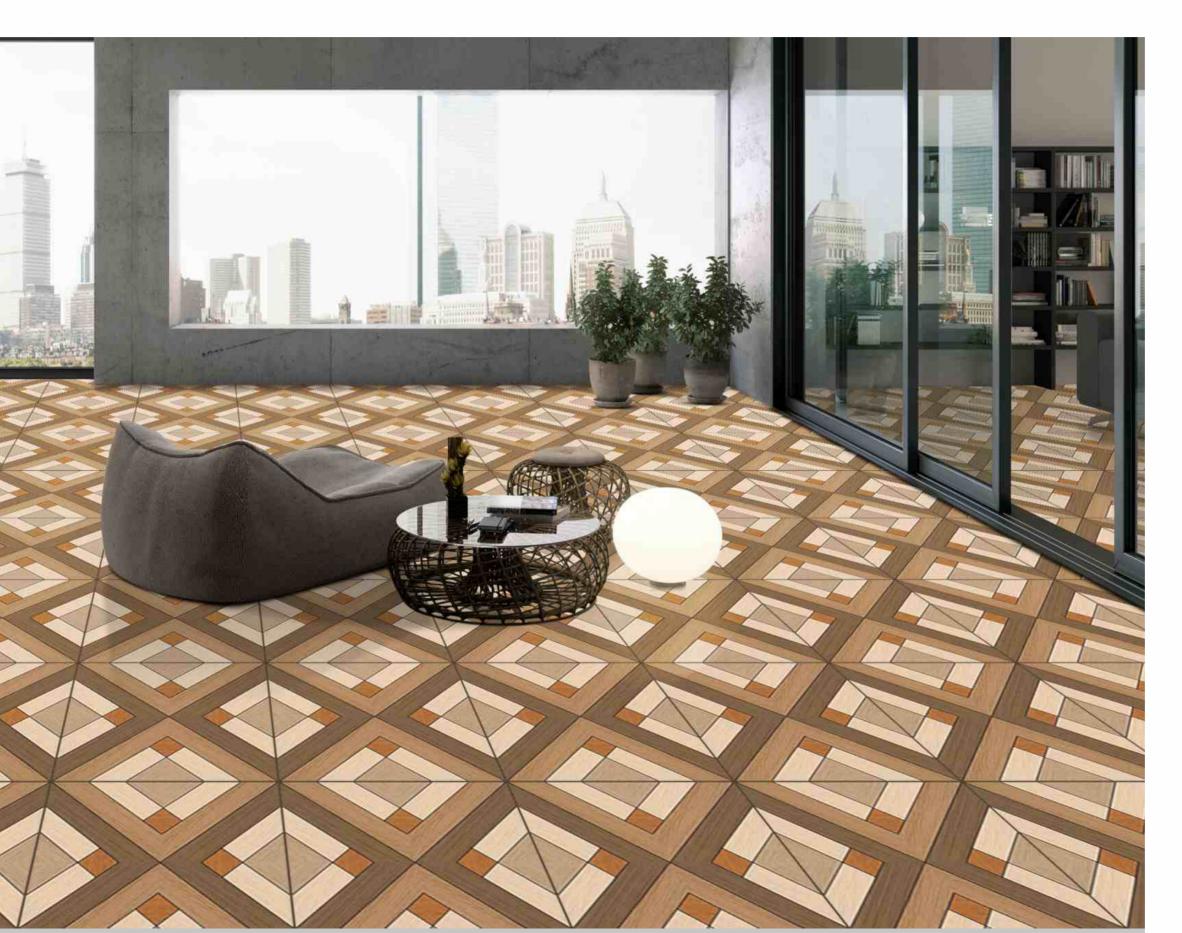

IMPRESS TEAK





Finish: MATT FINISH






RAIN WOOD BROWN





Finish: MATT FINISH



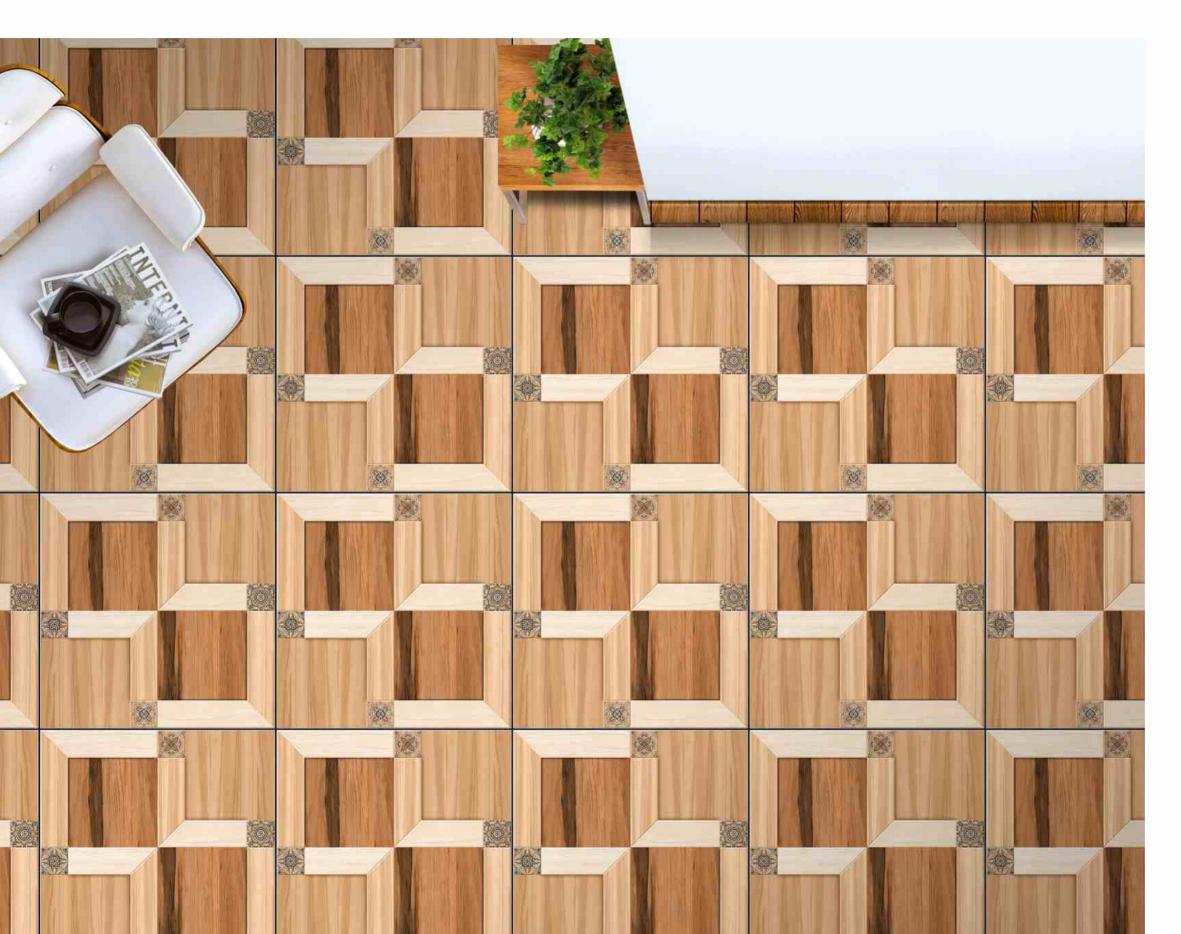


MADERA WOOD





Finish: MATT FINISH



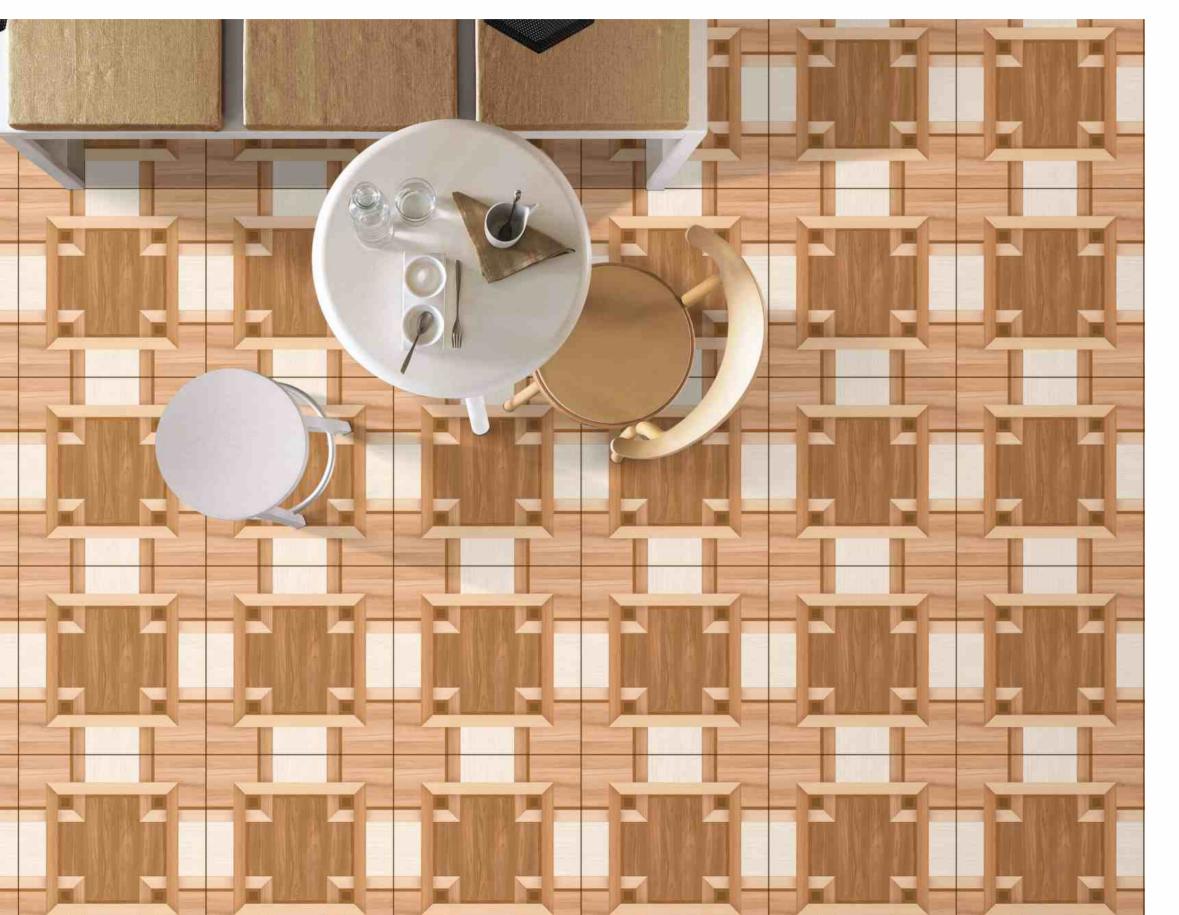

CHERISH NATURAL





Finish: MATT FINISH





OCEAN OAK




VARIATION GUID




DESIGN, PATTERN & SHADE VARIATION GUIDE

Current development efforts have made Ceramic tiles to resemble and look authentically identical to natural materials (Stone, Wood, Fabric), and it has become increasingly difficult in many cases, to distinguish between the tow.


Recognizing this situation, it is necessary to be informed on the grade of Design & Pattern variation that is expected form these products, as a general reference the Design & Pattern guide below classifies a scale of ranges according to the degree of the variation.








V2 Slight Variation



V3 Moderate Variation



V4 Substantial Variation

THE CLASSIFICATION IS AS FOLLOW:

V1 Minimal Variation

V2 Slight Variation **V3** Random Variation

V4 Substantial Variation

HIGH DEFINITION IMAGE

While Laying the tiles please follow the arrow Mark on the back of the tiles For removing the wax from the surface of the tiles please use the soft cotton cloth for rubbing white any boric/talc powder

TEN COMMANDMENTS FOR LAYING TILES

- 1. Surface should be cleaned properly before installation.
- 2. Tiles should be segregated according to batch no. & manufacturing date
- 3. Dry fixing: lay the tiles in the desired patterns, shades and signs etc. before final laying.
- 4. Fixing by good quality tile-adhesive or with 1:4 cement & sand mortar.
- 5. Use of 2 to 5 mm SPACERS is recommended.
- 6. Do not use an iron hammer or some heavy material to press the tiles.
- 7. After 48 hours for bed curing, fill the joints with desired grouts.
- 8. Clean tiles with detergent powder or soap.
- 9. Cover the surface with plastic sheet / POP until it becomes ready for use.

TECHNICAL SPECIFICATION



TECHNICAL SPECIFICATION OF GVT

| SIZE | Pcs. / Box | Coverage Area / Box |
|-----------|------------|---------------------|
| 600x600mm | 4 Pcs | 1.44 sq. mtr. |

| CHARACTERISTIC | International Standards Group Bla- ISO 13006 Annx. G. | SONATA MEAN VALUE | TEST METHOD |
|--------------------------------|---|--|--------------|
| Deviation In Length | ± 0.60% | ± 0.10% | ISO-10545-2 |
| Deviation In Thickness | ± 5.00% | ± 4.00% | ISO-10545-2 |
| Straightness Of Sides | ± 0.50% | ± 0.10% | ISO-10545-2 |
| Rectangularity | ± 0.60% | ± 0.10% | ISO-10545-2 |
| Surface Flatness | ± 0.50% | ± 0.15% | ISO-10545-2 |
| Surface Quality (%) | Min. 6 | Min. 6 | ISO-10545-2 |
| Scratch Hardness of Surface | A minimum of 95% of the tiles shall be | A minimum of 95% of the tiles shall be | ISO-10545-2 |
| (Moh's scale) | free from visible defects | free from visible defects | 150-10545-2 |
| Modulus of Rupture | > 35N/mm3 | > 38N/mm2 | ISO-10545-4 |
| Breaking Strength | > 1300 N | > 1500 N | ISO-10545-4 |
| Water Absorption | < 0.50% | < 0.50% | ISO-10545-3 |
| Stain Resistance | Stain Resistant | Stain Resistant | ISO-10545-14 |
| Chemical Resistance | No Damage | No Damage | ISO-10545-13 |
| Thermal Expansion | < 9 x 10-6 | < 7 x 10-6 | ISO-10545-8 |
| Moisture Expansion | Nil | Nil | ISO-10545-10 |
| Thermal Shock Resistance | No Damage | No Damage | ISO-10545-9 |
| Resistance to Surface Abrasion | Manu. to State Abrasion Class | PEI class 3-5 | ISO-10545-7 |
| Bulk Density | > 2.00 | > 2.20 | ISO-10545-3 |

Note: Colour Shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However, the company reserve the right to change the specifications without prior notice. Sometime variations in shade or size being inherent to ceramic industry may occur. Before fixing, we advise you to follow the fixing instructions on the cartons of the tiles as no responsibility can be accepted by the company once the tiles have been fixed.



SONATA CERAMICA PVT. LTD.

Near Sabar Dairy, Talod Road, At. & Po.: Gadhoda, Ta. Himmatnagar - 383 001.(S.K.), Gujarat. India

Mob.: +91 98240 24333. :: +91 90330 24333

E-mail: info@sonatatile.com





